RSR820-T

V1.64

2022-06-30

copyright © 2022

copyright © 2022

ô ó

-
-
-

-

/

2.

1

RSR820-T/RSR820-T(A) 32 RISC

RSR820-T/RSR820-T(A)

RSR820-T V1.1 TD-LTE(4G) TD-SCDMA(3G) GSM(2G)

RSR820-T V1.5\V1.6 TD-LTE(4G) FDD-LTE(4G) TD-SCDMA(3G) WCDMA(3G) GSM(2G)

RSR820-T(A) V1.0\V1.1 TD-LTE(4G) FDD-LTE(4G) TD-SCDMA(3G) WCDMA(3G) CDMA2000(3G) GSM(2G) CDMA1x(2G)

1.1 RSR820-T

	RSR820-T/RSR820-T(A)
	5 LAN/WAN 1 console RJ45 1 USB

RSR820-T

RSR820-T/RSR820-T(A) 1-

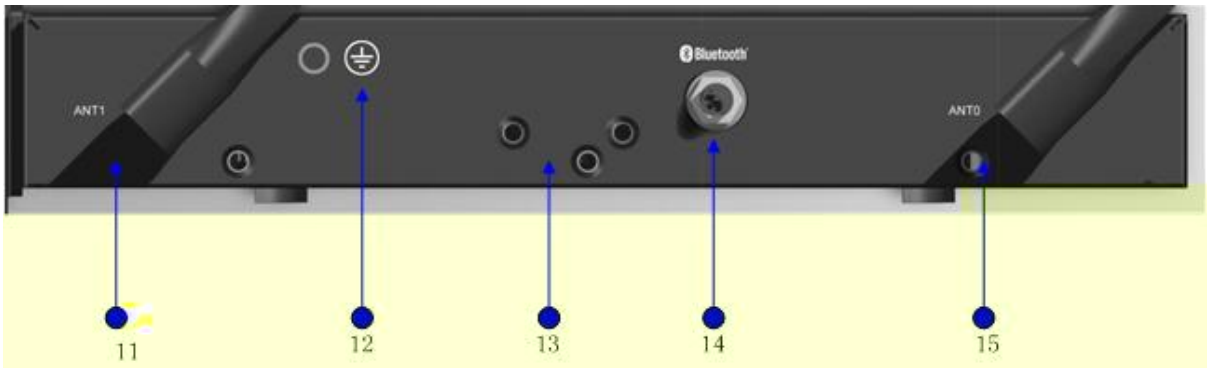

	1 SIM 2 FUNC 3 RSSI 4 SYS / 5 USB USB 6 Console 7 GE0 8 GE 1—4	9 10 11 4G ANT1 12 13 14 15 4G ANT0

RSR820-T/RSR820-T(A) 100 240V 50~60Hz 12V 1.25A

- VRRP
- PPPOE
- DNS DDNS
- X-MODEM
- NAT ACL AAA
- IPSEC L2TP PPTP

1.2.2

1.2.3

-
-

1.2.4

- DEBUG
-
- SNMP

- NAT
- IPSEC/IKE
- GRE
- VLAN

1.2.6

- X-MODEM (Windows XP Windows NT UNIX DOS) Console
- TFTP
- BOOTROM

U

2

2.1

-
-
-
-
-
-
-
-
-
- UPS

A

2.2

- /
-
-
-
-
-

2.2.1 /

RSR820-T/RSR820-T(A)

- -10 ~60
- 10%~90%

1.5m 0.4m

2.2.2

	0.5	1	3	5
( )	1.4×107	7×105	2.4×105	1.3×105

SO_2 H_2S NO_2 NH_3 Cl_2

	mg/m3	mg/m3
SO2	0.2	1.5
H2S	0	0.03
NO2	0.04	0.15
NH3	0.05	0.15
Cl2	0.01	0.3

2.2.3

-
-
-

1)

2)

3)

4)

5)

6)

2.2.4

■

■

■

■

2.2.5

■

■

■

2.2.6

/

⚠

18 24

2.2.7

■ /

■

■

2.3

-
-
-
-
-
-
-
-

RSR820-T/RSR820-T(A)

- HUB
- PC
-

- ■
- ■
- ■

3.2.1

30mm

Ģ ŗ 2 ʳ . ƀ ŗ

h^G § T + c Ã

3-1

3.2.3

19

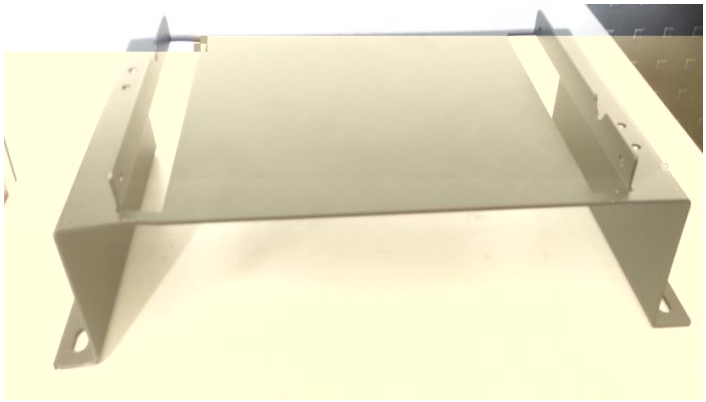

3-4

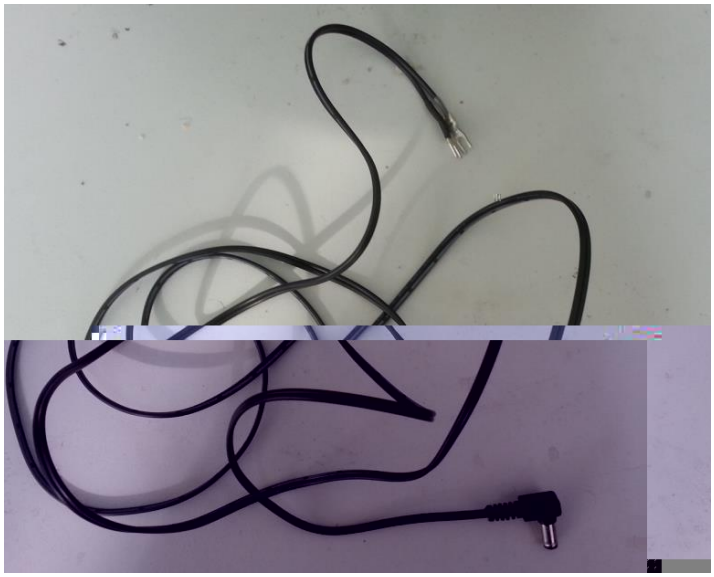

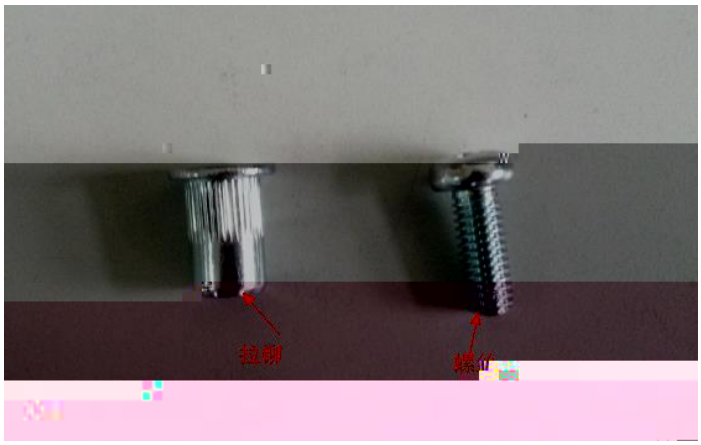

RSR820-T/RSR820-T(A) 2 3-7

3-7 RSR820-T/RSR820-T(A)

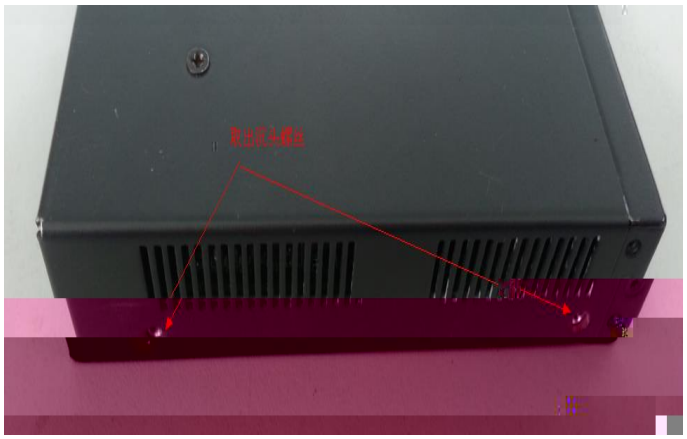

RSR820-

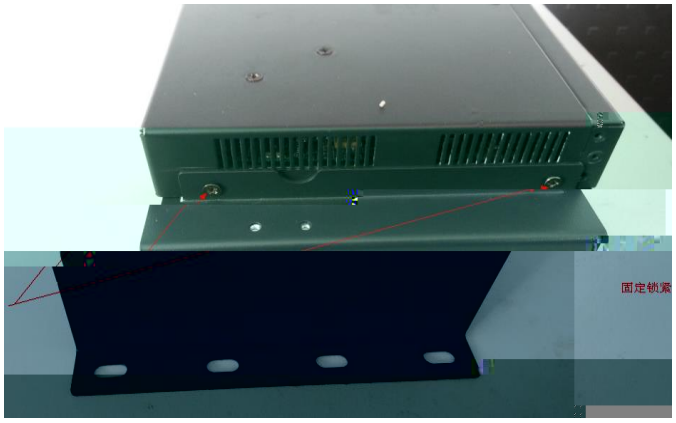

2 3-10

3-10

3-11

4 3-12

3-11

3-12

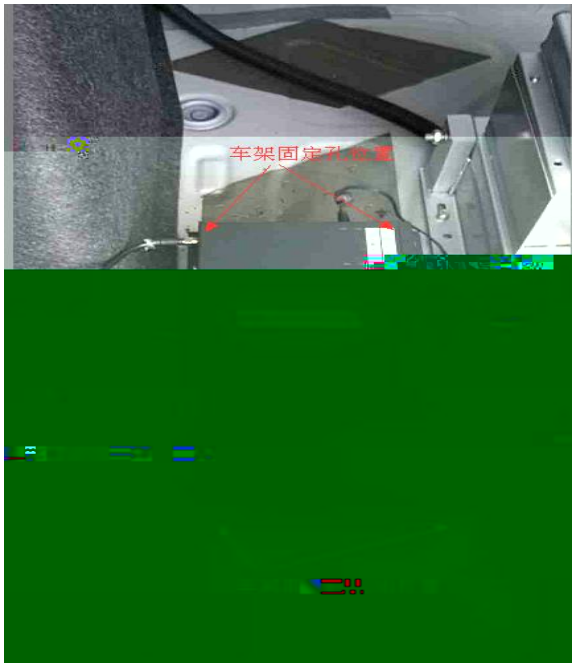

2 4G

3-14

3-14 4G

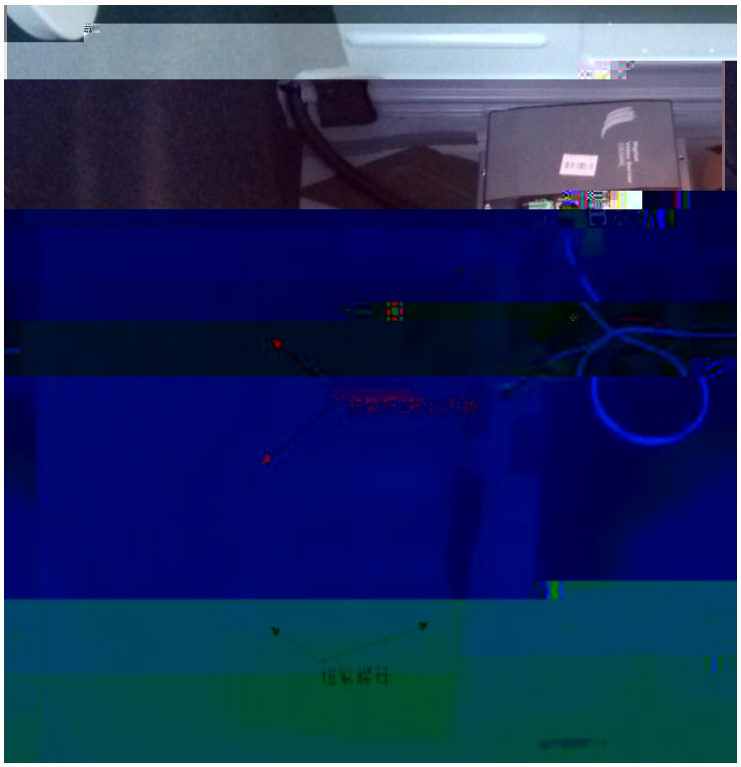

DC 3-4

DC 3-15

3-15 DC

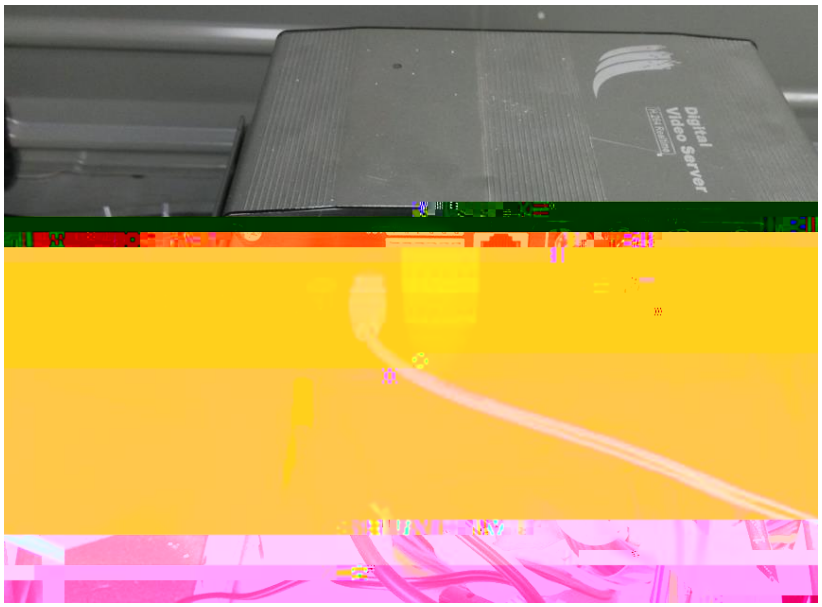

3.3

2 4G ANT0 ANT1 1 Bluetooth

5

		3m ATM
		/ 4G/

3.4

RSR820-T/RSR820-T(A)

AC: 100~240V 50-60Hz

DC: 12V/1.25A

3.5

EIA/TIA-232 Console

	RJ-45
	EIA/TIA-232
	9600bps
	1 2

RJ45 DB-9

4

4.1

4.1.1

Console

RS232 Console

Console

Windows

Hyperterm( )

Console 9600 8 1

T100 Windows

4-1

4-2 Console

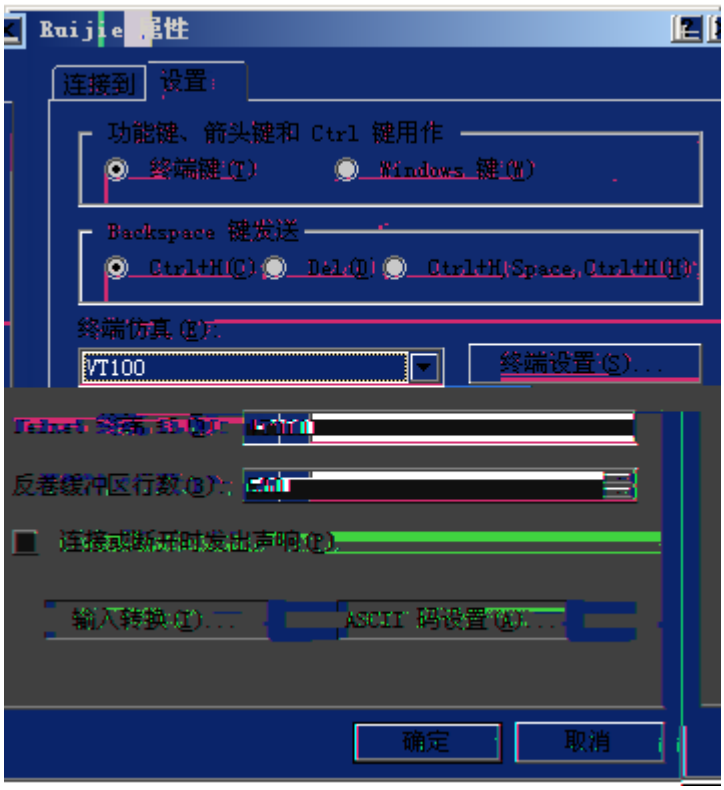

4.2

4.2.1

-
-
-

4.2.2

4.2.3

-

- SYS
-
-

4.2.4

```
System bootstrap ...
Boot Version: RGOS 10.4(3b13) Release(166021)
Nor Flash ID: 0x0102194D, SIZE: 33554432Bytes
MTD_DRIVER-5-MTD_NAND_FOUND: 1 NAND chips(chip size : 134217728) detected
Press Ctrl+C to enter Boot .....
Verify the image ..[ok]
Loading main program ...
Loading main program 'rgos.bin'.
Load main program successfully.
Executing program, launch at: 0x04000000

MTD_DRIVER-5-MTD_NAND_FOUND: 1 NAND chips(chip size : 134217728) detected

Self decompressing the image:
################################################################################################
################################################################################################
################################################################################################
################################################################################################
################################################################################################
################################################################################################
################################################################################################
################################################################################################
################################################################################################
################################################################################################
################################################################################################
################################################################################################
################################################################################################
################################################################################################
################################################################################################
################################################################################################
################################################################################################
################################################################################################
################################################################################################
################################################ [OK]
Self decompressing the image succeed and will jump to 0x00010000...

Ruijie General Operating System Software
Release Software (tm), RGOS 10.4(3b13) Release(165064), Compiled Tue Aug  6 14:11:06 CST 2013 by ngcf68
```

Copyright (c) 1998-2013s by Ruijie Networks.
All Rights Reserved.
Neither Decompiling Nor Reverse Engineering Shall Be Allowed.

*Jan 1 00:54:20: %MTD_DRIVER-5-MTD_NAND_FOUND: 1 NAND chips(chip size : 134217728) detected
*Jan 1 00:54:38: %DEVICE-5-CHANGED: Device RSR820-T (1) changed state to up.
*Jan 1 00:54:38: %USB-5-MODEM_FOUND: Modem <XXXX> bind with tty 1.
*Jan 1 00:55:24: %SYS-5-WARMSTART: System coldstart.

5

5.1

RSR820-T/RSR820-T(A) SYS

-
-
-
-

SYS

5.2

-
-
-
- 9600 8 1 VT100

6

6.1

6.1.1 CONSOLE

CONSOLE RJ45 DB9F RJ45
RJ45-DB9 PC DB9M

6-

DB9

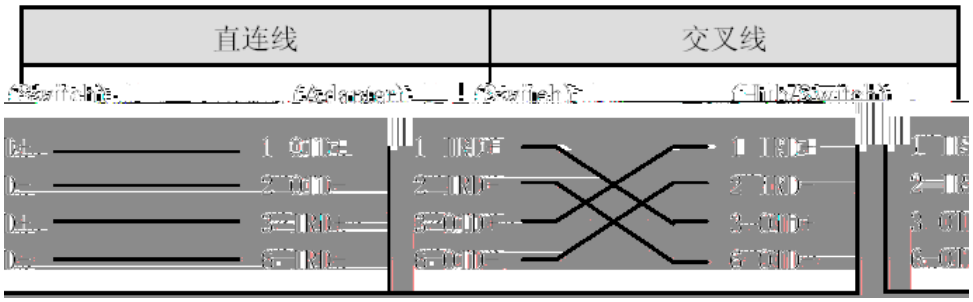
直连线
交叉线