



RG-IIB-N86KS



# 目录

---

安全使用说明事项.....	1
装箱清单.....	3
接口连接说明.....	3
面板按键说明.....	6
OPS电脑安装.....	7
遥控器.....	8
基本操作说明.....	8
产品	
软件升级.....	28
简单问题的处理方法.....	28
技术规格.....	29
产品中有毒有害物质或元素的名称及含量.....	30

1. ---
2. ---
3. ---
4. ---
5. ---
- 6.
- 7.
- 8.
9. 24
- 10.
- 11.
12. ( )  
-20°C 60°C  
0°C 40°C
- 13.
- 14.
15. >2.5cm >10cm >10cm
- 17.
- 19.
- 21.
- 22.
- 23.
24. i
- 25.
- 26.
- 27.
- 28.
- 30.


32.

\*


36.

/

# 装箱清单

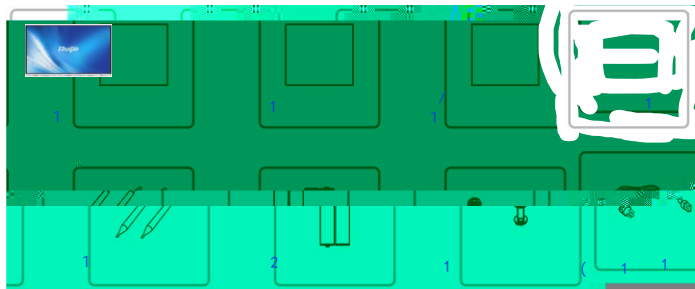


# 接口连接说明

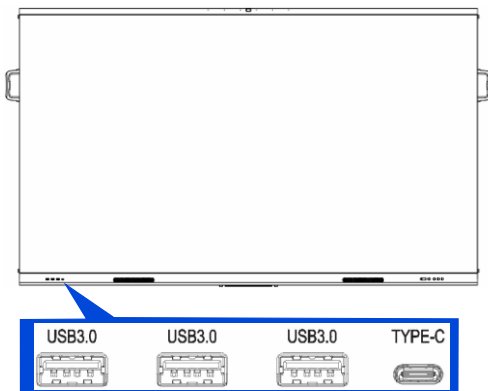

# 接口连接说明


1



2



● AUDIO-IN



● TOUCH



◆ TOUCH USB

TOUCH USB

● HDMI-IN



◆ HDMI  
EDI D2.0  
HDMI 1



4K@60Hz, 4K@60Hz 时  
5 <1s EDI D





EDI D

接HDMI1接口。

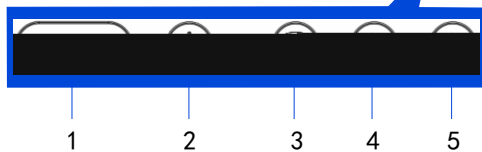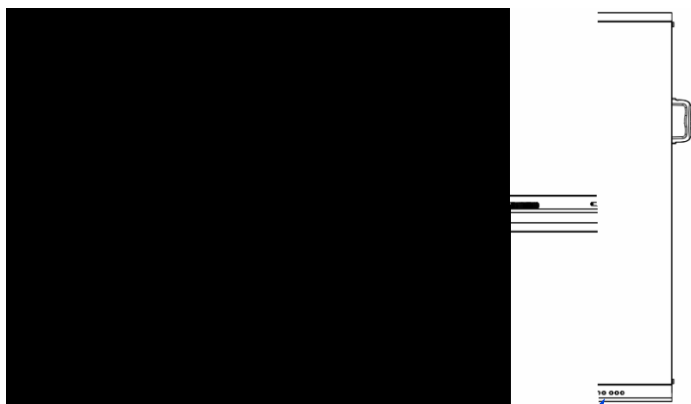

# 面板按键说明




1. \_\_\_\_\_ ;
2.  : \_\_\_\_\_ ;
3.  : \_\_\_\_\_ ;
4.  : \_\_\_\_\_ ;
5.  : \_\_\_\_\_ ;
6. \_\_\_\_\_ 。

窗；

CPS



CPS

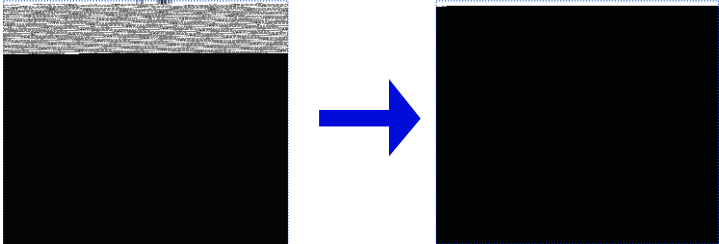


CPS

CPS

CPS


,

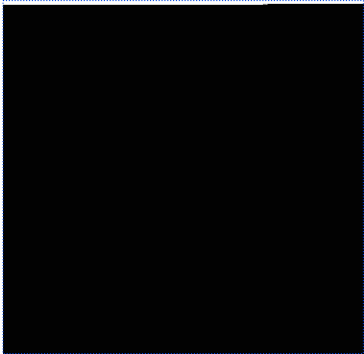

CPS

CPS

。

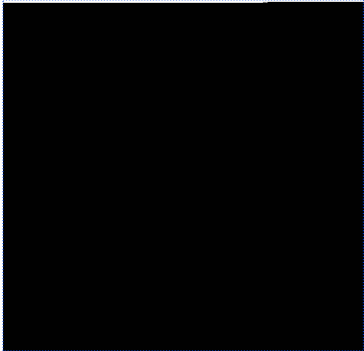

3.

4.

1.

2.

3.

4.

5. OPS

(1)



(0)

OPS

OPS

OPS

OPS


OPS  
OPS

OPS


OPS



OPS

OPS

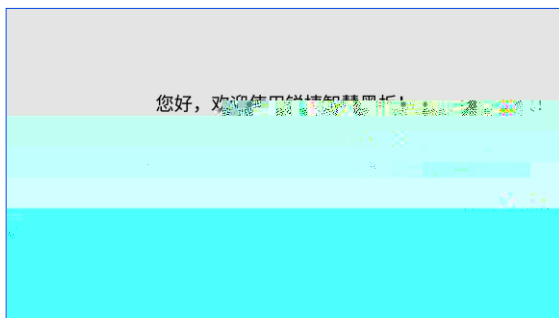


QPS

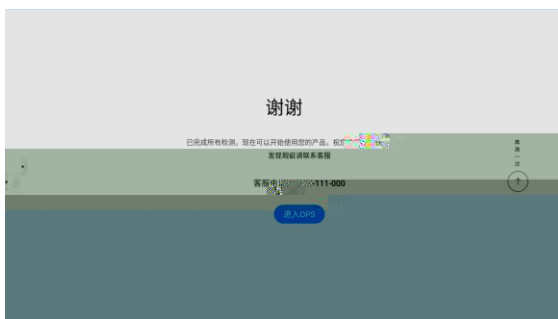

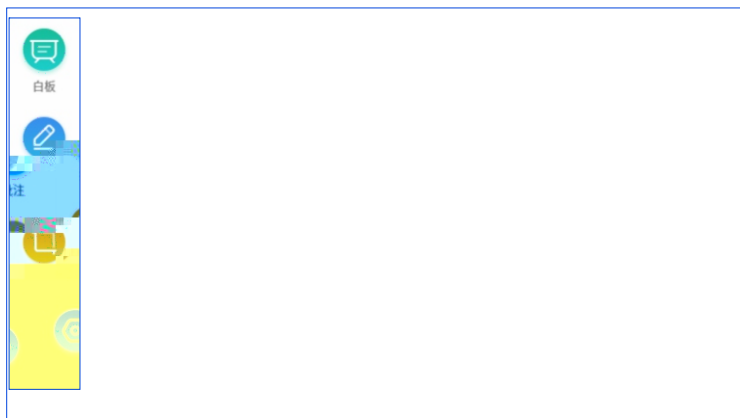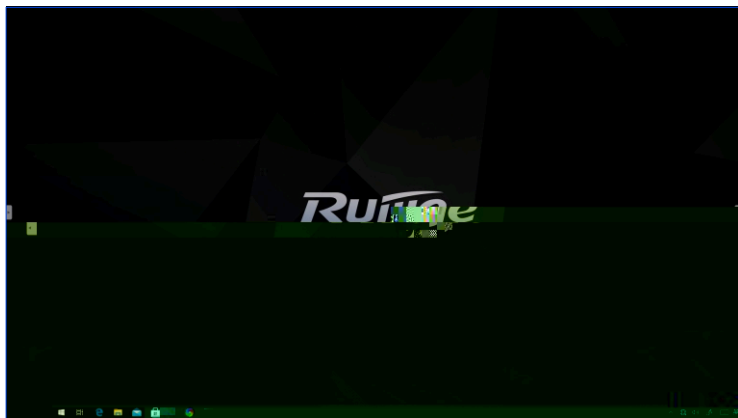


- 1.
- 2.
- 3.
- 4.
- 5.

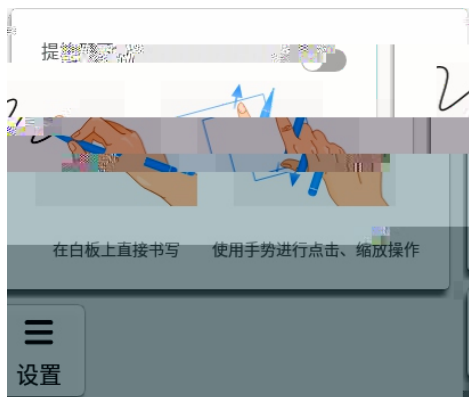

- 1.
- 2.

30%-500%

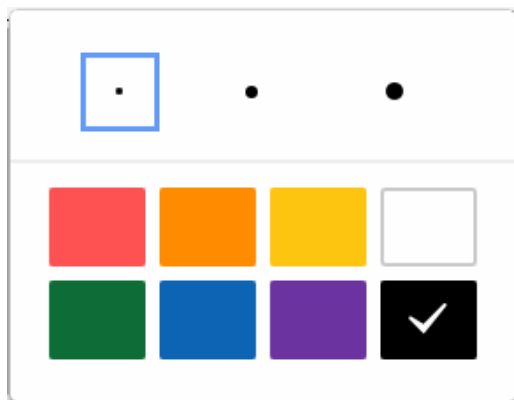





1.



2.







- 1.
2. OPS                    OPS
3. HDM 1                HDM 1
4. HDM 2                HDM 2
- 5.
- 6.
- 7.
- 8.





Wi-Fi  
SSID

SSID

SSID

SSID





2

6. DNS1

DNS

8.

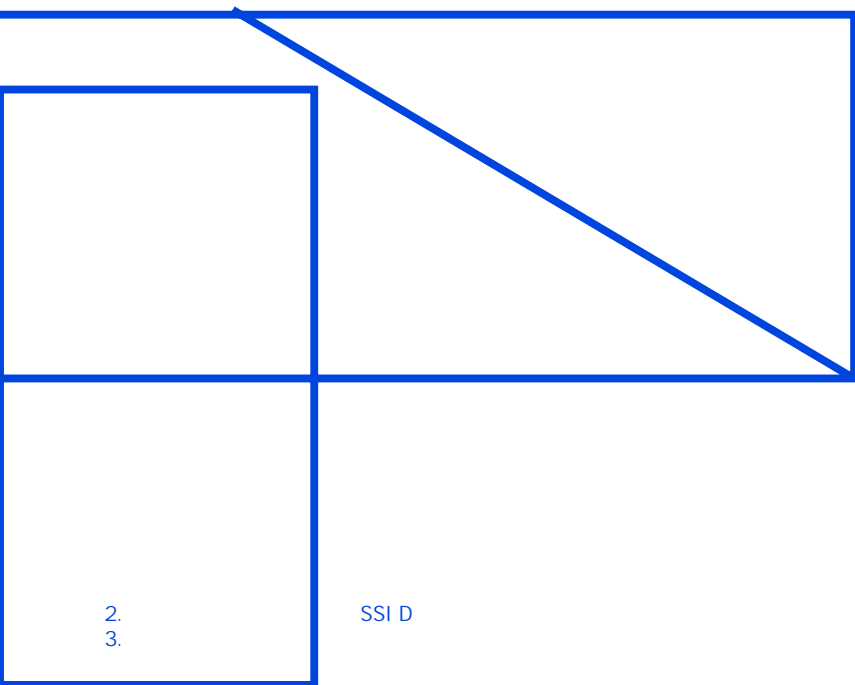

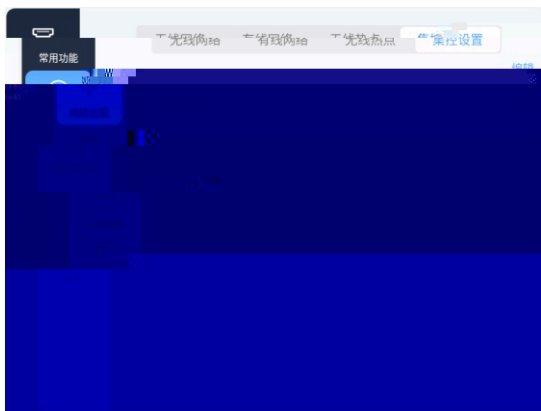


- 1.
- 2.
- 3.
- 4.



1. 24
- 2.
- 3.
- 4.
- 5.

24

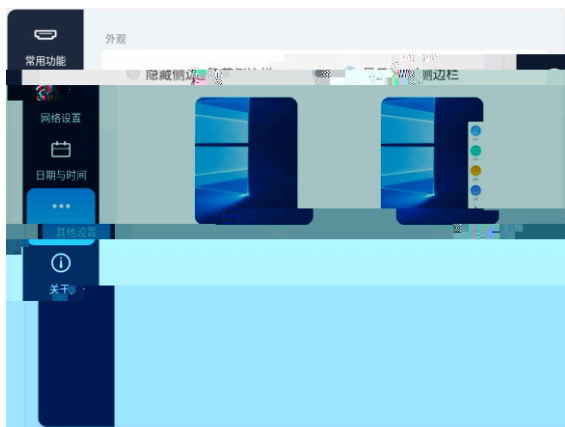

按照如下  
(点 <1s)。


5次以上

# 基本操作说明








10999  
192.168.1.100:10999


IP 192.168.1.100  
ADB


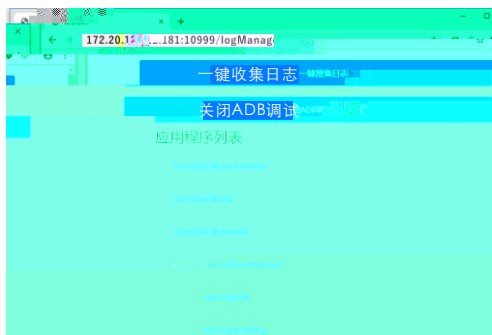



OPS

o

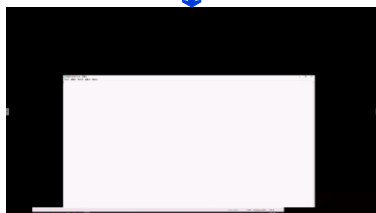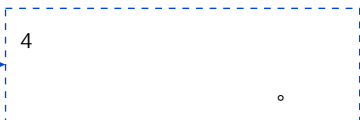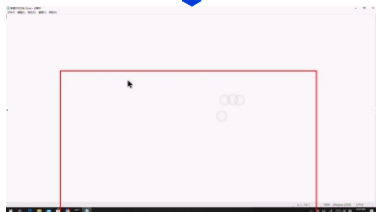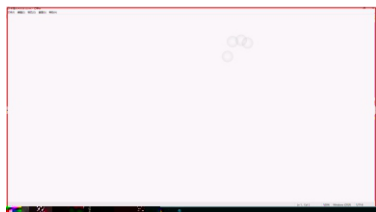



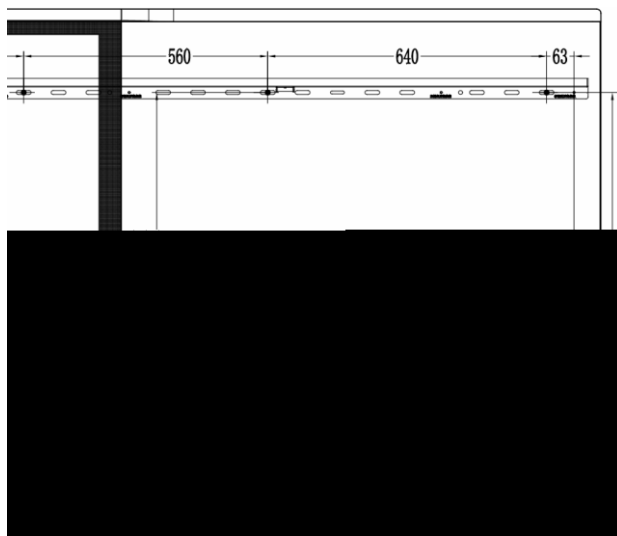




- 1.
- 2.
- 3.




- 1.
- 2.
- 3.
- 4.
- 5.



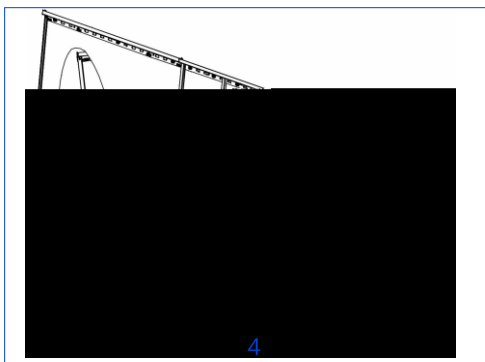


- 1.
- 2.
- 3.
- 4.
- 5.

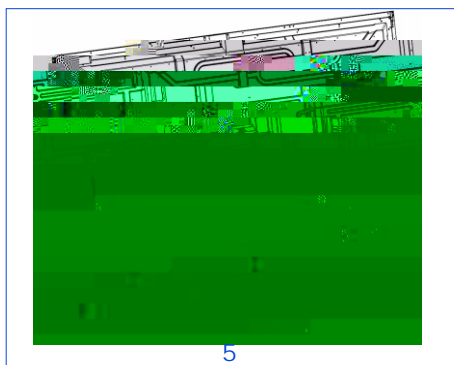

- 1.
- 2.

A/C




1.


2.

3.


4.

2 M4螺丝

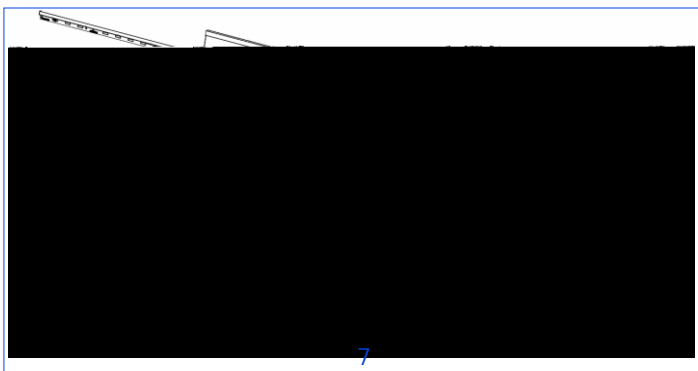

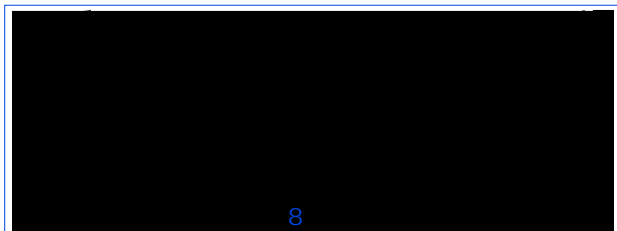

1.





## 技术规格

	RG-IIB-N86KS
	AC 220V 50Hz/60Hz ( AC 100-240V 50Hz/60Hz)
	440W
	≤ 0.5W
	1
( × × )	4200mm× 1209.7mm× 110.5mm
× ×	1997mm× 1209.7mm× 110.5mm
× ×	1101.5mm× 1209.7mm× 110.5mm
	69kg
	20.6kg
	-20 -60
	10%-90% RH
	0 -40
	10%-90% RH
HDMI	2
LAN	2
AUDIO-IN	1
AUDIO-OUT	1
RS232(DB9)	1
USB 2.0	1
USB 3.0	3
USB TOUCH	1
USB Type-C	1

- 1.
- 2.

产品中有毒

(



锐捷网络股份有限公司

福州市金山

服务: asp

远程技术服务中心

技术支持 永不间断