

RG-AP730(TR)

RG-AP730(TR)

# Contents

MU MIMO  
SSID

WIDS







# Contents

MU MIMO

SSID

WIDS

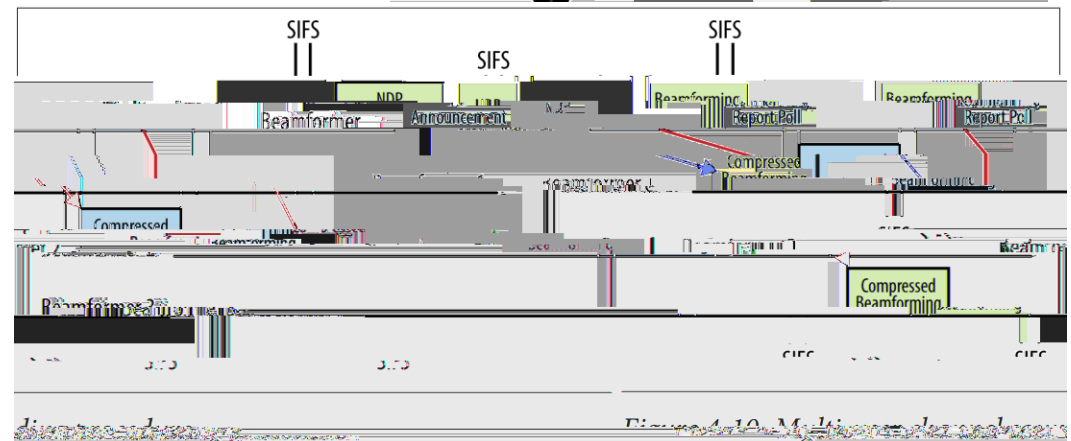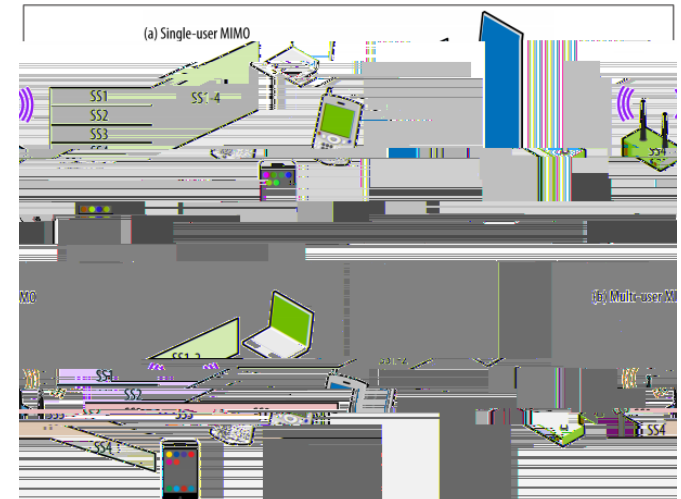

26#AC1(config-ap)#mu-mimo enable radio 2

26#AC1(config-ap)#show ac-config client

MU

# Contents

MU MIMO

SSID

WIDS

26#AC1(config-ap)#hide-ssid sta-reach-limit [ radio { 2.4g | 5g } ]

# Contents

MU MIMO  
SSID

WIDS

```
26#AC1(config-ap)# inter-radio-balance num-balance enable
26#AC1(config-ap)# inter-radio-balance radio 1 weight 50
```

# Contents

MU MIMO  
SSID

WIDS



# Contents

MU MIMO  
SSID

WIDS

1

( )

2



# Contents

MU MIMO  
SSID


WIDS


1

2

3

4 EWEB

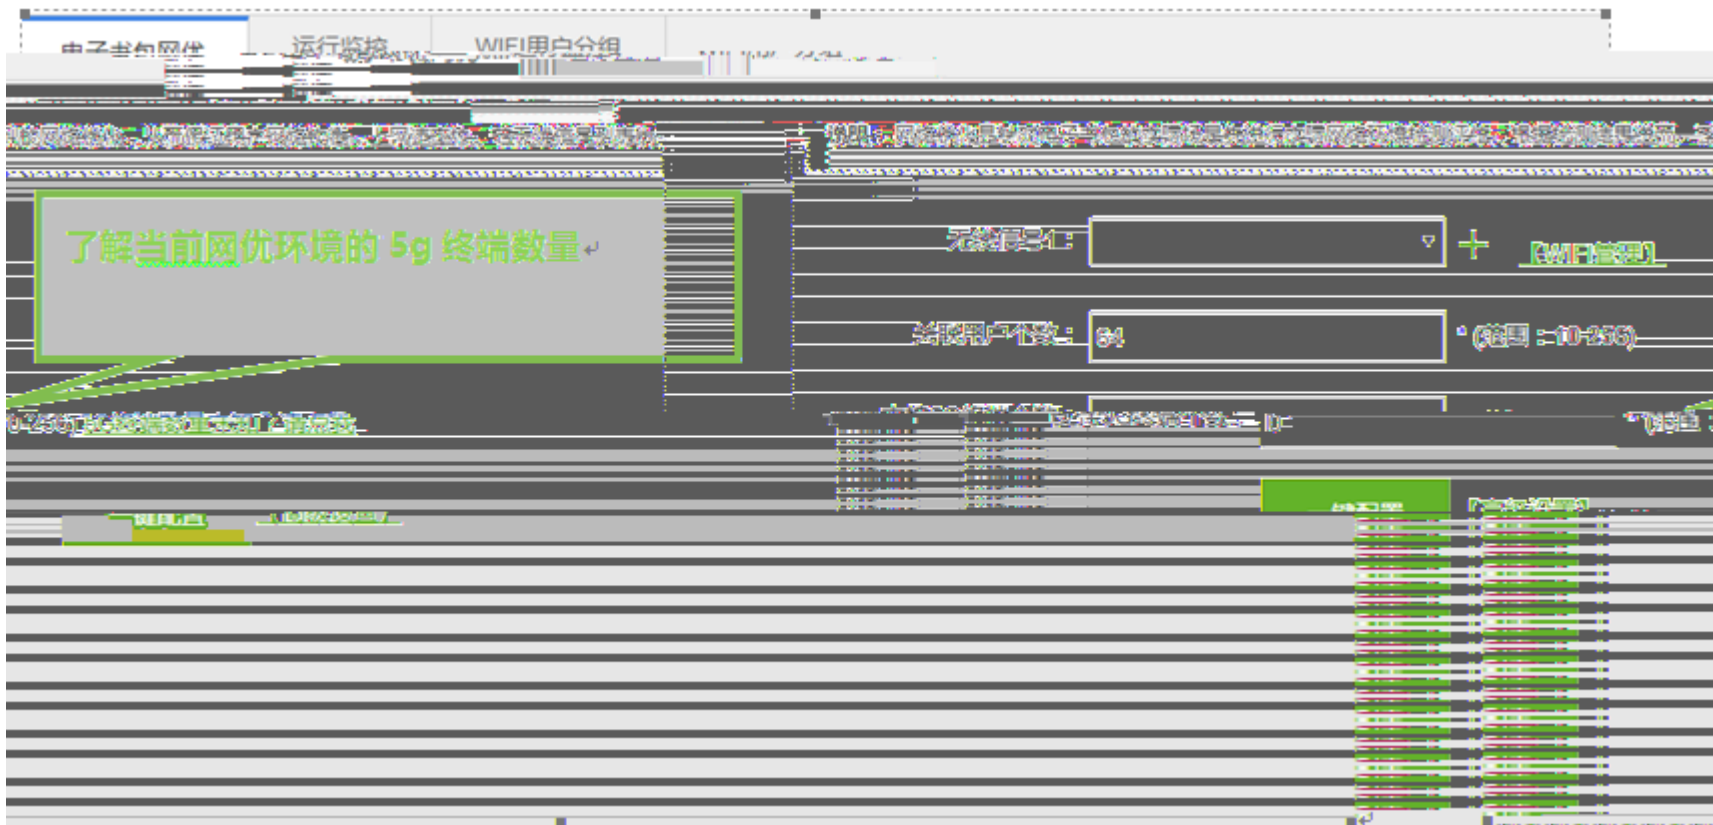



# Contents

MU MIMO

§ SSID

WIDS



+

\_\_\_\_\_

+

\_\_\_\_\_

+

\_\_\_\_\_

7kuille 7kuille

+

\_\_\_\_\_

+

