



RG-IIB-N86KS

目录

| | |
|-------------------------|----|
| 安全使用说明事项..... | 1 |
| 装箱清单..... | 3 |
| 接口连接说明..... | 3 |
| 面板按键说明..... | 6 |
| OPS电脑安装..... | 7 |
| 遥控器..... | 8 |
| 基本操作说明..... | 8 |
| 产品 | |
| 软件升级..... | 28 |
| 简单问题的处理方法..... | 28 |
| 技术规格..... | 29 |
| 产品中有毒有害物质或元素的名称及含量..... | 30 |

安全使用说明事项

1. ---
2. ---
3. ---
4. ---
5. ---
- 6.
- 7.
- 8.
9. 24
- 10.
- 11.
12. ()
-20°C 60°C
0°C 40°C
- 13.
- 14.
15. >2.5cm >10cm >10cm
- 17.
- 19.
- 21.
- 22.
- 23.
- 24.
- 25.
- 26.
- 27.
- 28.
- 30.


32.

*


36.

/

装箱清单

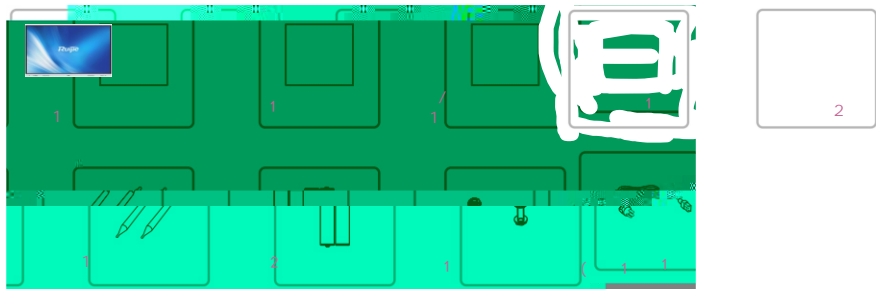

接口连接说明

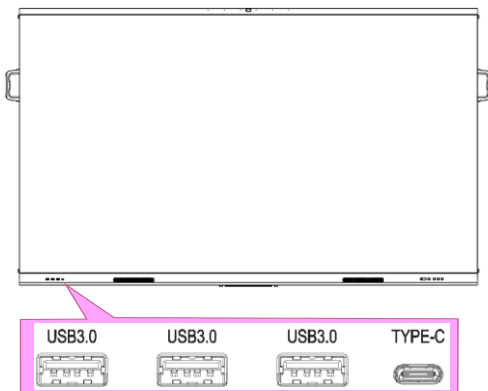

接口连接说明

1



2



● AUDIO-IN



● TOUCH



◆ TOUCH USB

TOUCH USB

● HDMI-I N



◆ HDMI
EDI D2.0
HDMI 1



4K@60Hz, 4K@60Hz 时
5 <1s EDI D

EDI D

接HDMI1接口。



面板按键说明

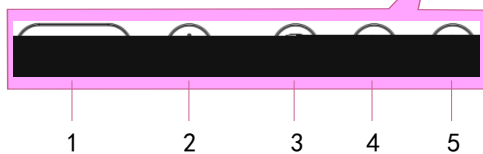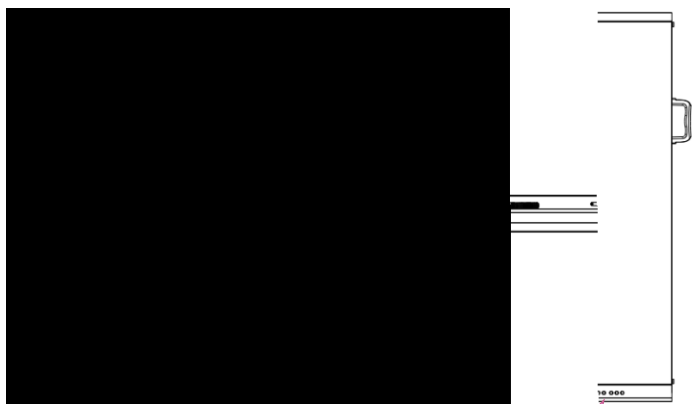

6

- 1.
2.  : ;
3.  : ;
4.  : ;
5.  : ;
6.  .



窗;

OPS电脑安装

CPS



CPS

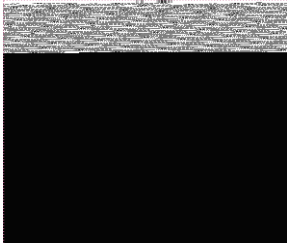


CPS

CPS

CPS


,

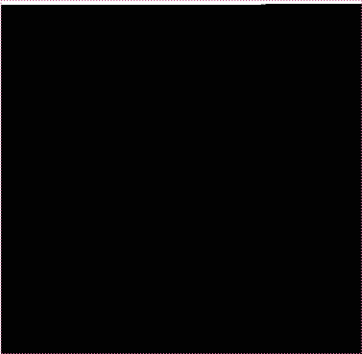

CPS

CPS

。

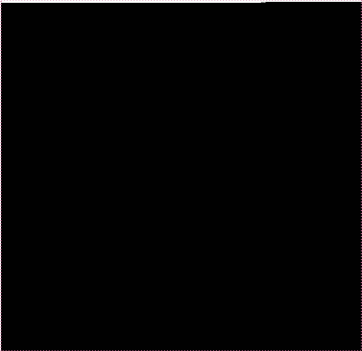

遥控器

3.

4.



1.


2.

3.


4.



5. OPS



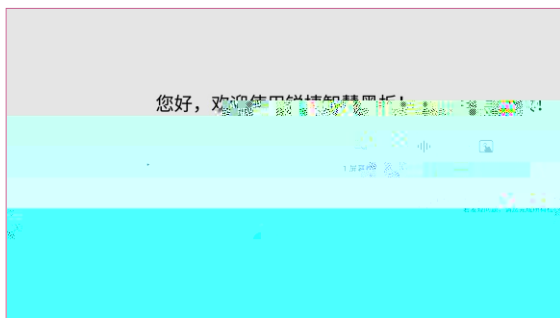


QPS

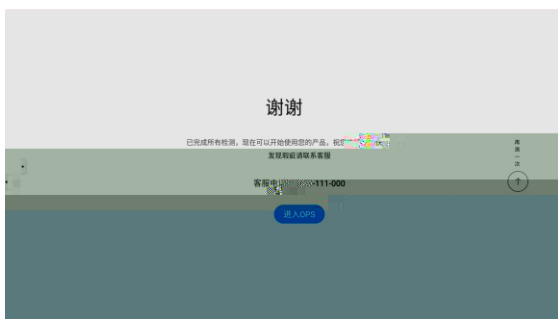

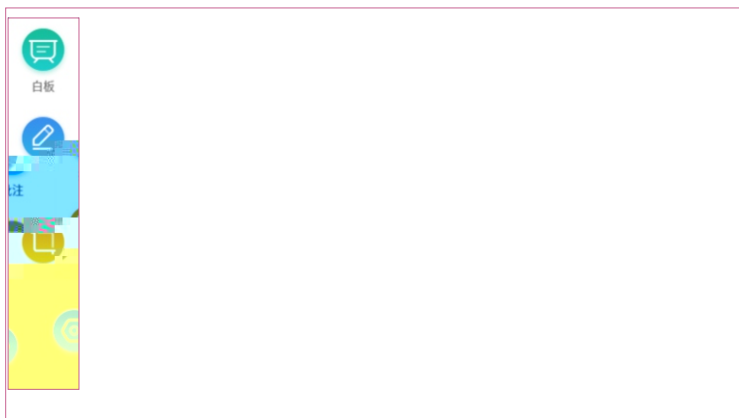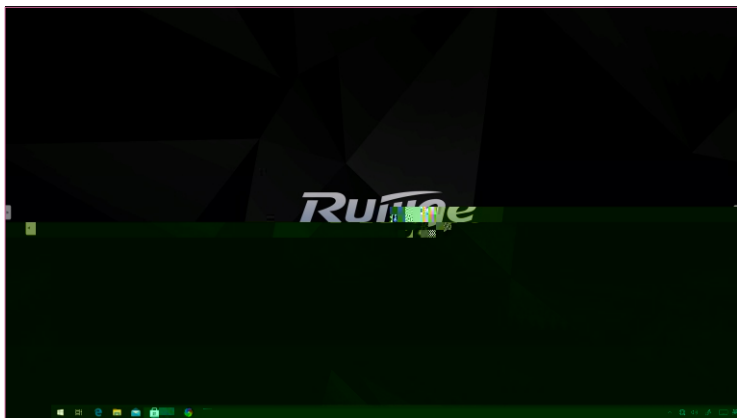


- 1.
- 2.
- 3.
- 4.
- 5.

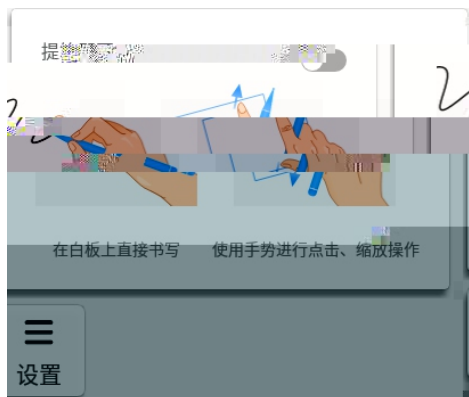

- 1.
- 2.

30%-500%

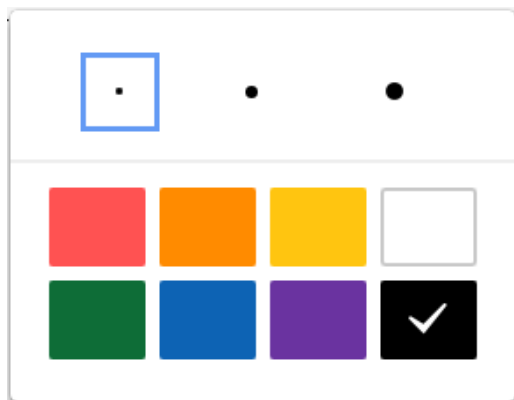



1.



2.






- 1.
2. OPS OPS
3. HDM 1 HDM 1
4. HDM 2 HDM 2
- 5.
- 6.
- 7.
- 8.



基本操作说明

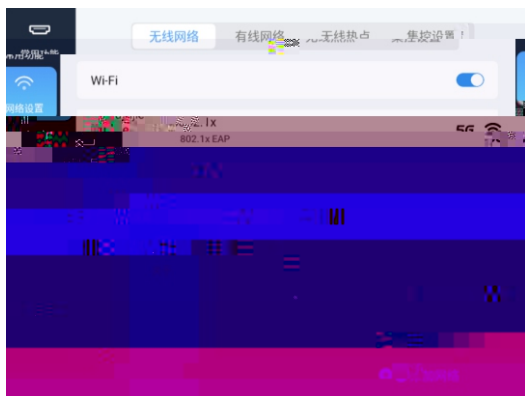


Wi-Fi
SSID

SSID

SSID

SSID

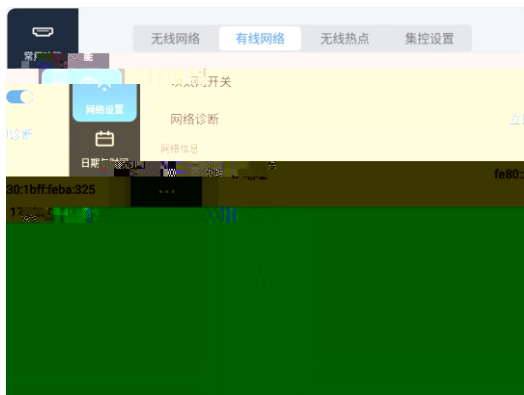



2

6. DNS1


DNS

8.

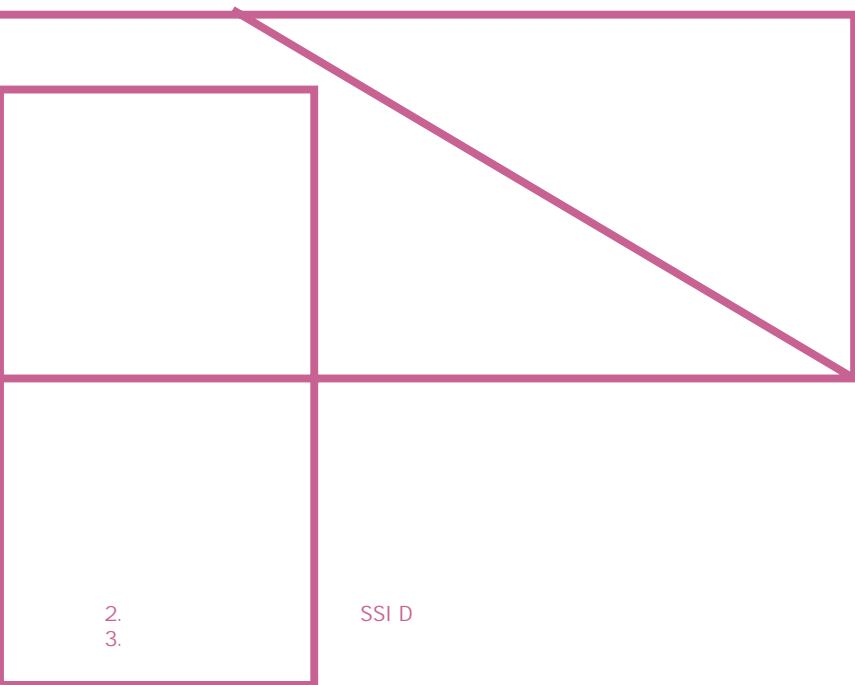


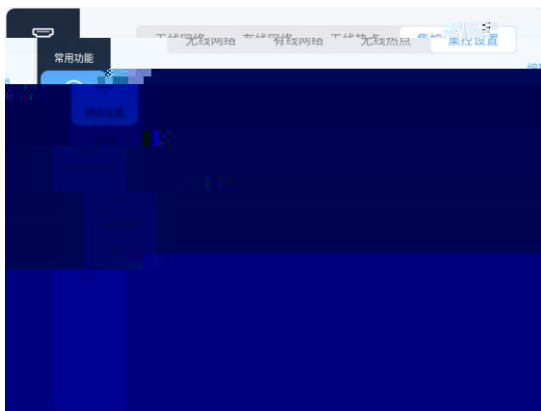


- 1.
- 2.
- 3.
- 4.

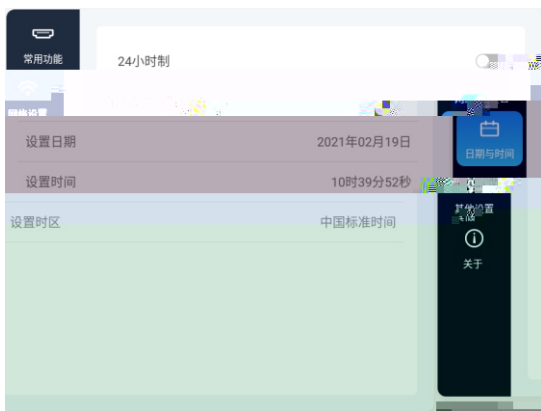

1. 24
- 2.
- 3.
- 4.
- 5.

24

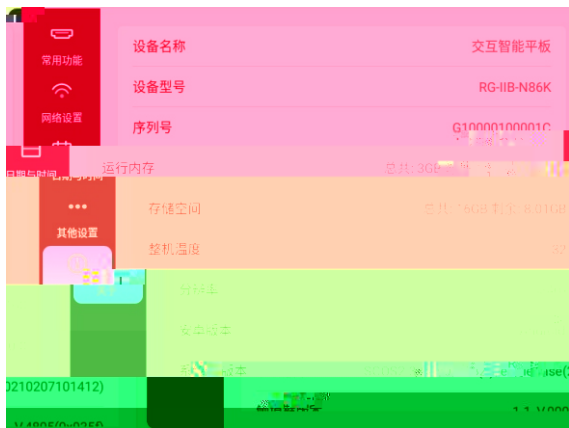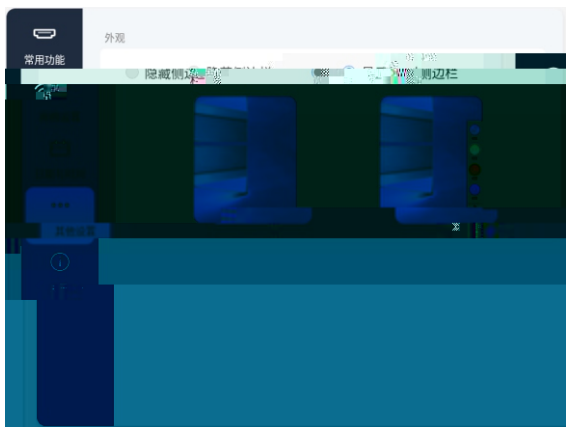


◆ :按照如下 (点 <1s)。 5次以上

基本操作说明





10999
192.168.1.100:10999



IP 192.168.1.100
ADB

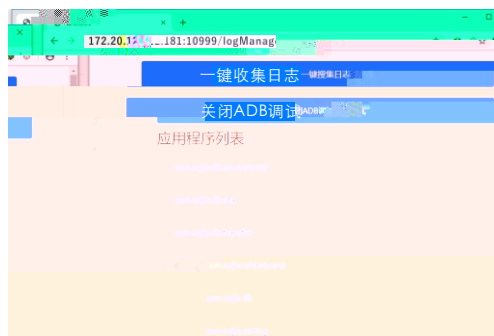


OPS

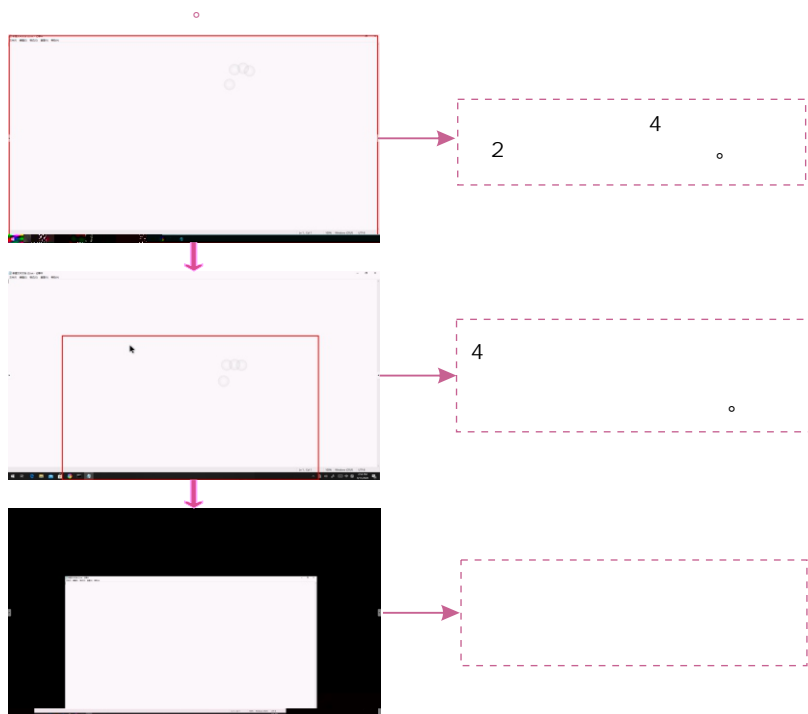



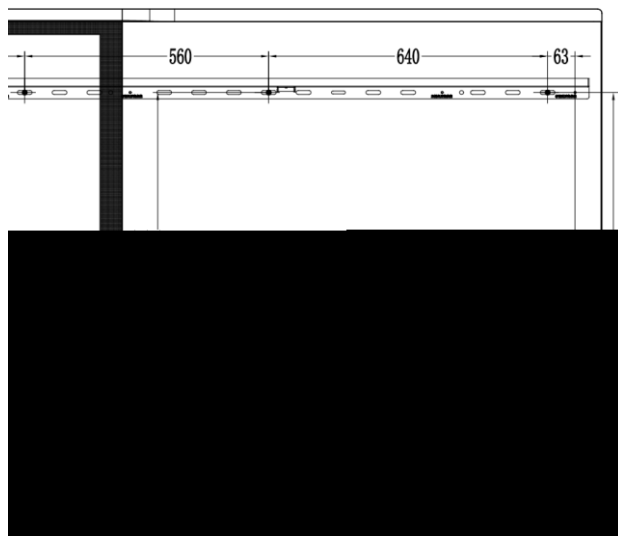





- 1.
- 2.
- 3.



- 1.
- 2.
- 3.
- 4.
- 5.

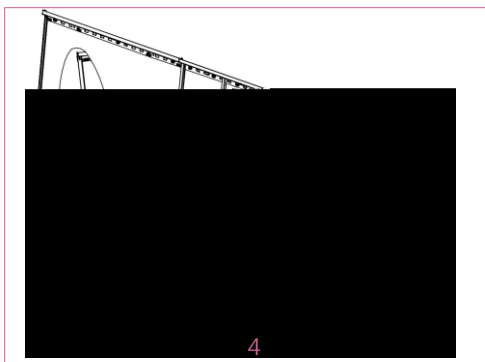


- 1.
- 2.
- 3.
- 4.
- 5.

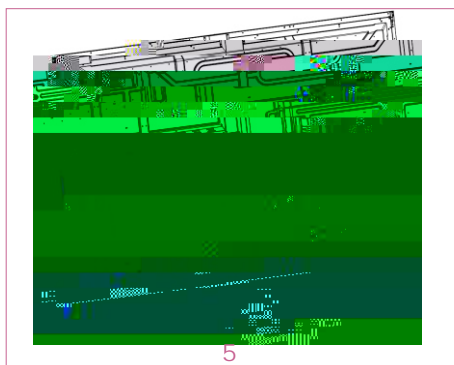

- 1.
- 2.

A/C




1.

2.

3.


4.

2 M4螺丝

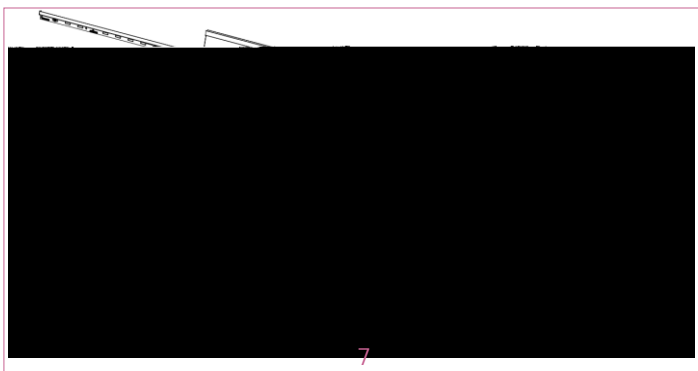




1.



技术规格

| | RG-IIB-N86KS |
|------------|--|
| | AC 220V 50Hz/60Hz (AC 100-240V 50Hz/60Hz) |
| | 440W |
| | ≤ 0.5W |
| | 1 |
| (× ×) | 4200mm× 1209.7mm× 110.5mm |
| × × | 1997mm× 1209.7mm× 110.5mm |
| × × | 1101.5mm× 1209.7mm× 110.5mm |
| | 69kg |
| | 20.6kg |
| | -20 -60 |
| | 10%-90% RH |
| | 0 -40 |
| | 10%-90% RH |
| HDMI | 2 |
| LAN | 2 |
| AUDIO-IN | 1 |
| AUDIO-OUT | 1 |
| RS232(DB9) | 1 |
| USB 2.0 | 1 |
| USB 3.0 | 3 |
| USB TOUCH | 1 |
| USB Type-C | 1 |

- 1.
- 2.

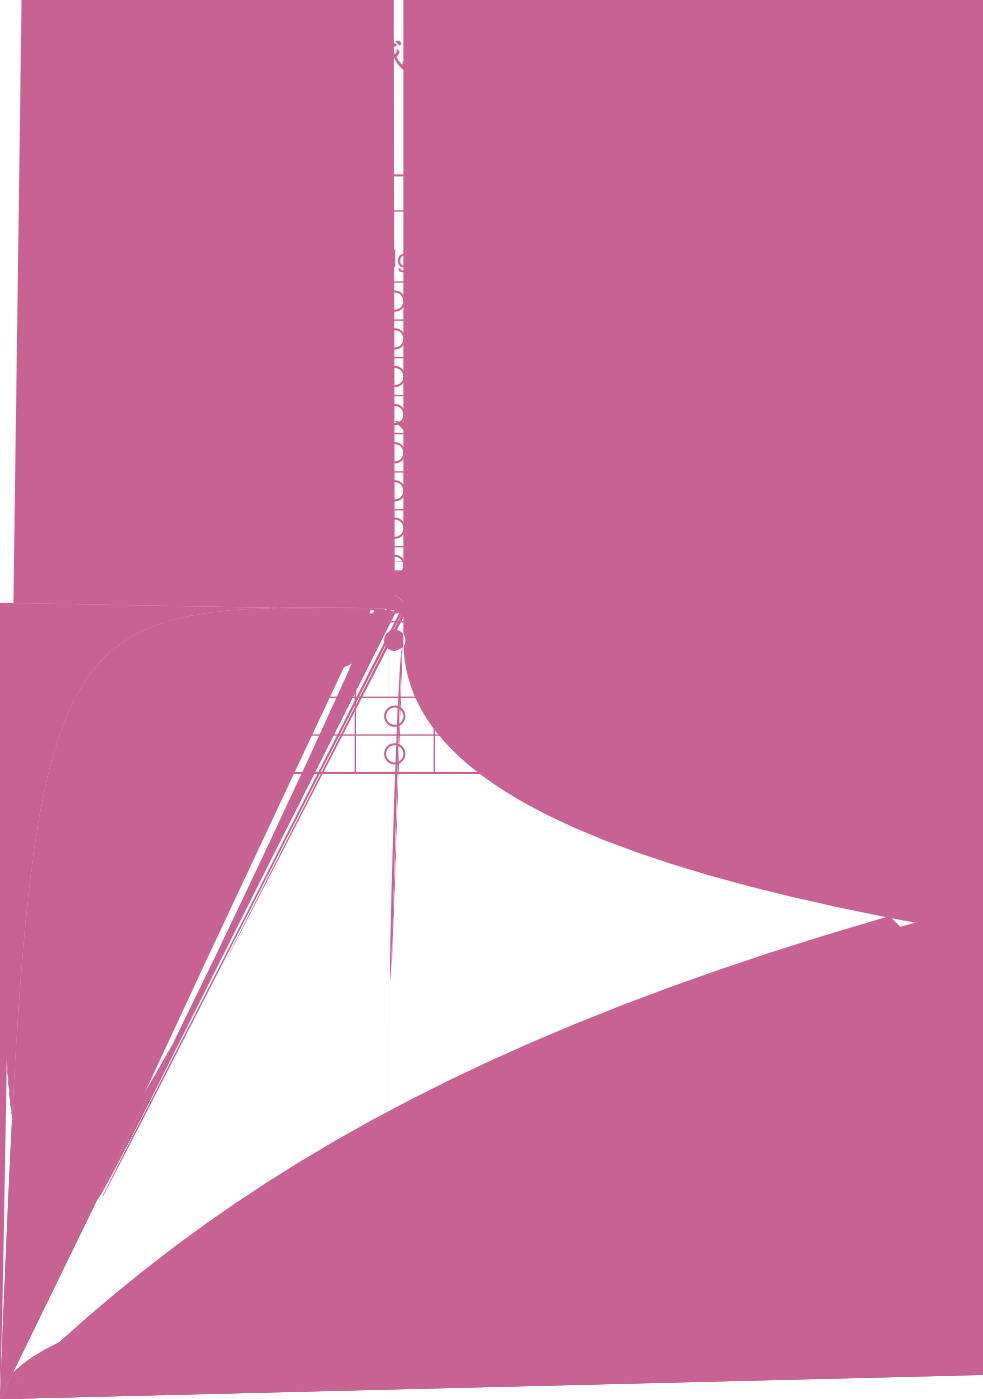



锐捷网络股份有限公司

福州市金山麓山大道18号橘园洲工业园区皇南园锐捷科技园

服务电话: 400-886-9999 技术支持: <http://www.ruijie.com.cn/service.aspx> 远程技术服务中心: <http://www.ruijie.com.cn> 400-886-9999