

RG-CT7528

V1.2

2025-07-29

copyright © 2025

copyright © 2025



<https://www.ruijie.com.cn>

<https://www.ruijie.com.cn/fw/>

<https://wind.ruijie.com.cn/>

7*24h

<https://ocs.ruijie.com.cn>

7*24h

4008-111-000

<https://www.ruijie.com.cn/special/fw/tool/xryf/>

4008111000@ruijie.com.cn

doc@ruijie.com.cn



APP

1.





/

2.

1

RG-CT7528

| | |
|--|--|
| | |
|--|--|

-
- (1) LED 5
 - (2) 4 USB3.0 USB3.0 U USB2.0
 - (3) Type-C U
 - (4)
 - (5) CMOS CMOS
 - (6) 4 USB2.0 USB2.0
 - (7) 10M/100M/1000M
 - (8) VGA
 - (9) HDMI
 - (10) 19V 7.11A

1.3



1-2



| | |
|--|--|
| | 1 DC 1 3.5mm 1 10M/100M/1000M 1 Type-C (USB3.2 GEN2(10Gbps)) 4 USB3.0 (USB3.2 GEN2(10Gbps)) 4 USB2.0 1 VGA 2 HDMI |
| | RAINOS |

Wi-Fi



Wi-Fi

| | |
|------|---|
| | 60W |
| | |
| | 0°C 40°C -40°C 70°C 3000~5000 220 1 |
| | 10%RH~90%RH 5%RH~90%RH |
| | 0m~5000m |
| | |
| | 1920x1080@60Hz VGA 4096x2160@60Hz HDMI |
| | |
| VESA | |
| | BIOS |

2

2.1

RG-CT7528

RG-CT7528

10cm

RG-CT7528 0 C 40 C -10 C
50 C 10%RH 90%RH 5%RH 95%RH 48
15


RG-CT7528

2.2

2-1




3-2

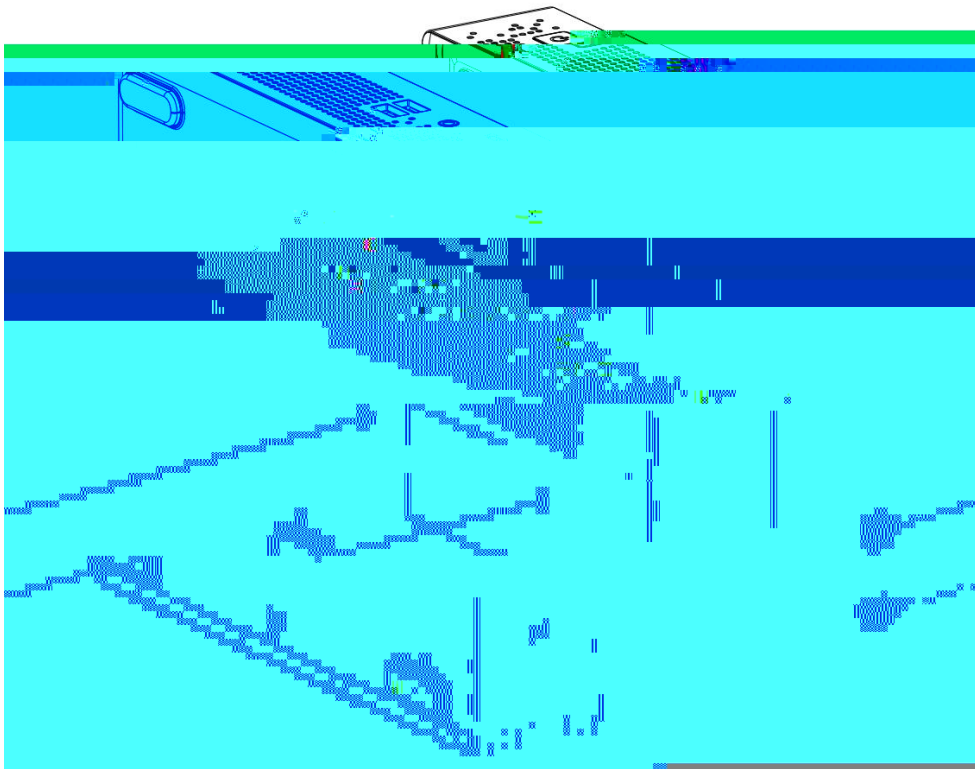


(3)

3-3

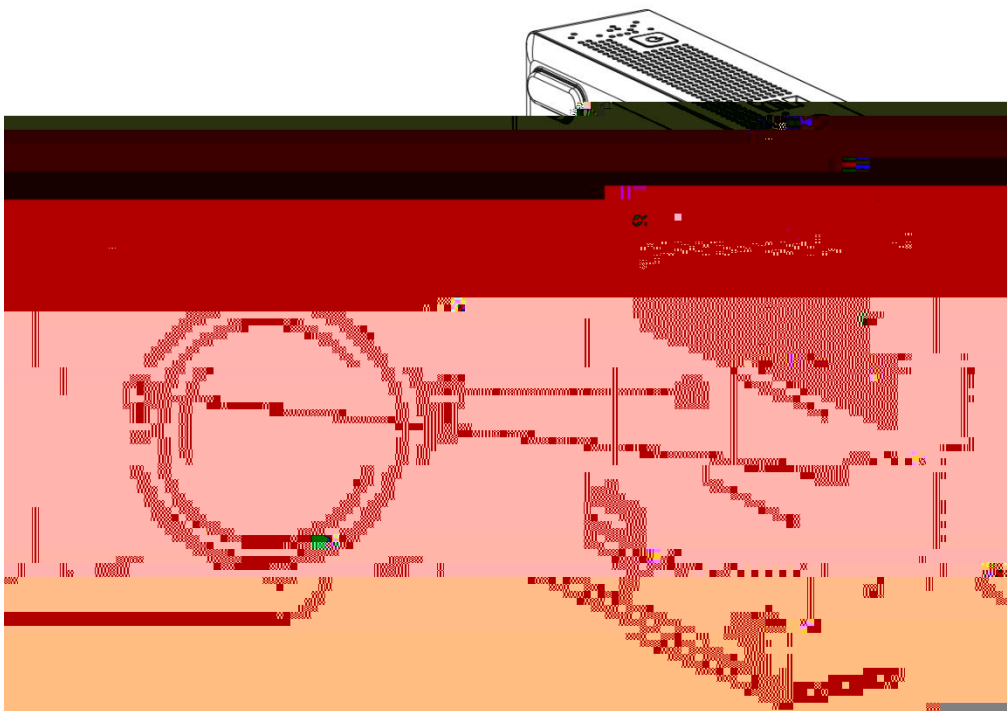


(4)

3-4

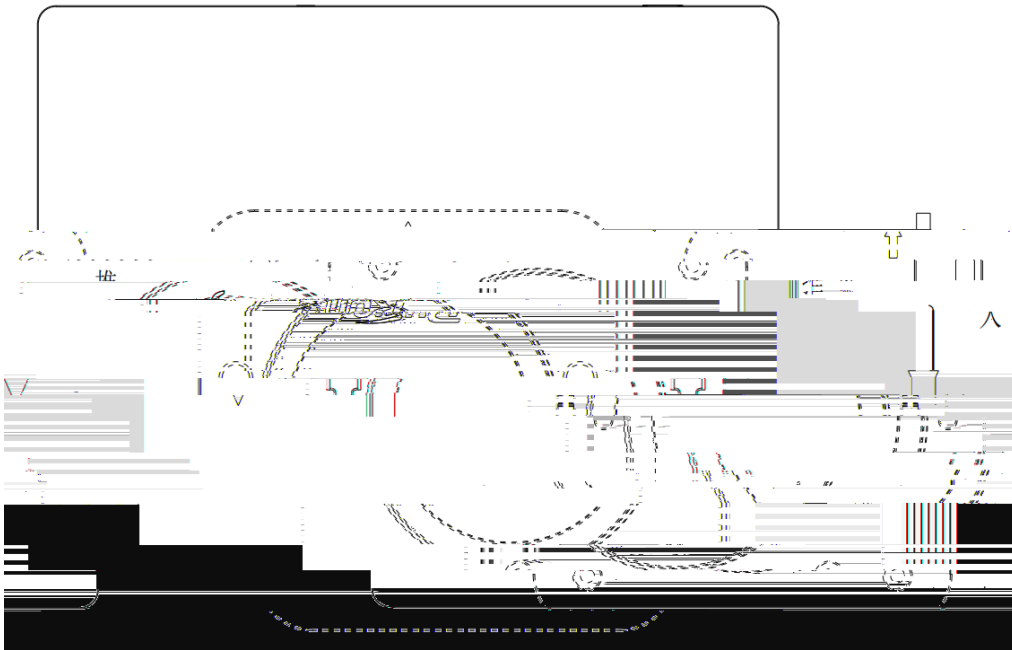

3.2

3-5

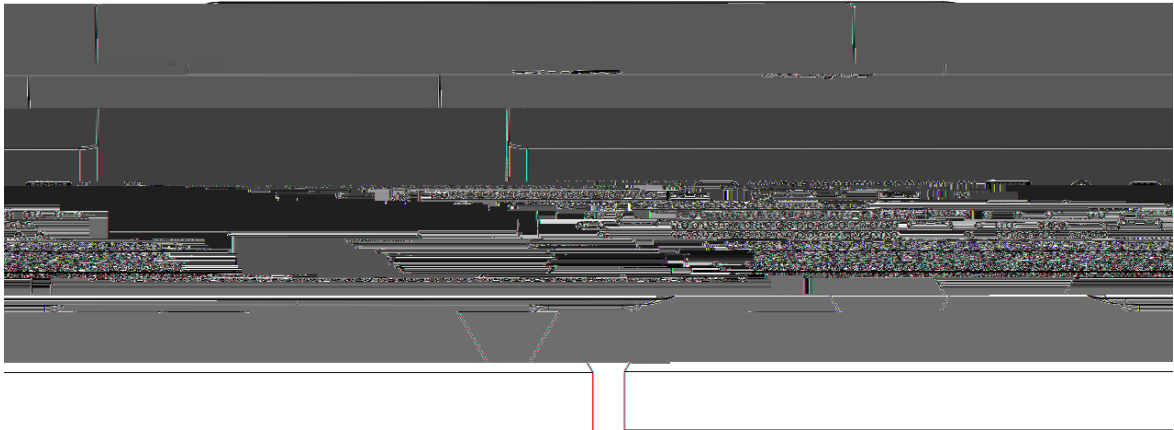

3-6


3-7

3.3

VGA HDMI

3.4

3-9

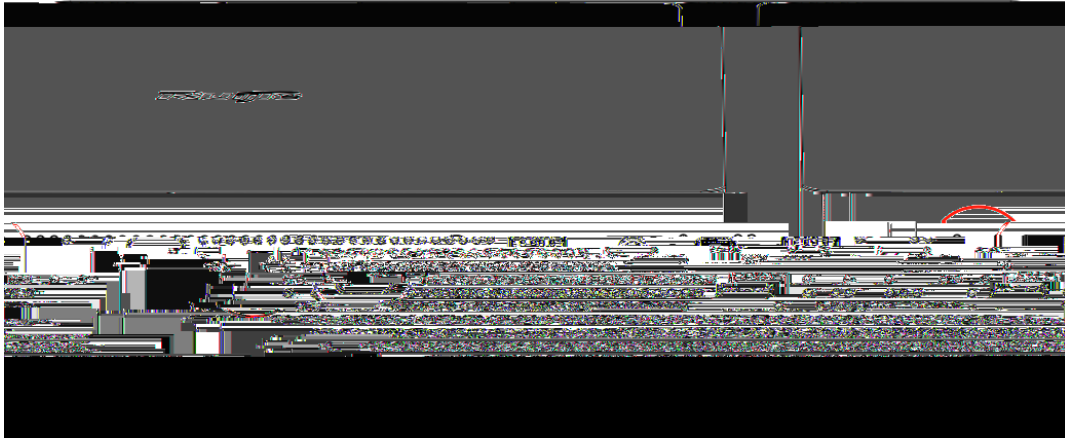

4

4.1

0 ~40

4.2

/

180V~240V

|

USB

Type-C

USB

15W

USB

4.3

4.4

4.5

4.6

9

24

120/240V 20A

5

SJ/T11364-2006

5-1

| | (Pb) | (Hg) | (Cd) | Cr(VI) | | |
|--|------|------|------|--------|--|--|
| | | | | | | |

| | | | | | | |
|---|------------|--|--|-----------|--|--|
| | | | | | | |
| | | | | | | |
| | | | | | | |
| 1 | SJ/T 11364 | | | GB/T26572 | | |
| | | | | GB/T26572 | | |
| 2 | 1 | | | | | |
| 3 | 2 | | | | | |