
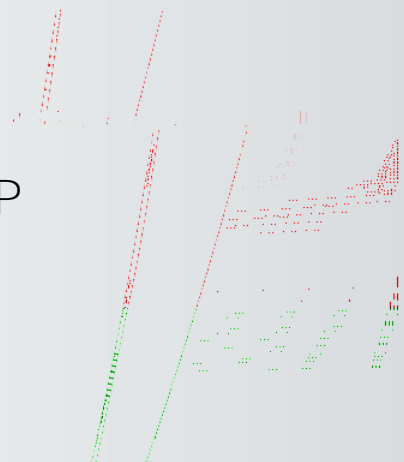


WEB

APP

CLI

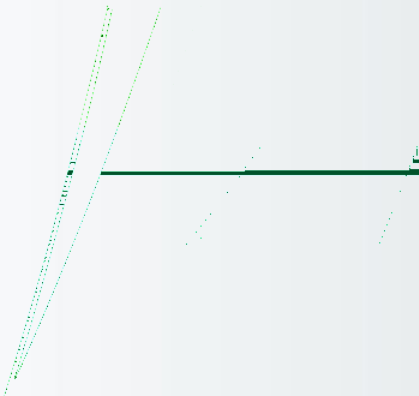

WEB

WEB

The screenshot displays a network management web interface. At the top, there are tabs for '设备概览' (Device Overview) and '配置管理' (Configuration Management). Below these, a table lists network interfaces with columns for '接口名称' (Interface Name), '接口类型' (Interface Type), '接口状态' (Interface Status), '所属VLAN' (VLAN), and 'IP地址/掩码' (IP Address/Mask). The table shows several interfaces, including GigabitEthernet-1/1 and GigabitEthernet-1/2, with their respective types and connection statuses.

接口名称	接口类型	接口状态	所属VLAN	IP地址/掩码
GigabitEthernet-1/1	二层交换接口	已连接	1	
GigabitEthernet-1/2	二层交换接口	未连接	1	
GigabitEthernet-1/3	二层交换接口	未连接	1	


Other visible elements include a 'CPU利用率' (CPU Usage) graph showing 0.01% usage, '设备信息' (Device Information) section with fields for '网络运营商' (China Mobile), '4G-SIM类型' (TDD-LTE), and 'SIM卡状态' (SIM Card Status). The bottom right corner shows system details: 'WEB地址: 1.1.3(175810)', '系统时间: 2014年 8月 4日 15:50:17', and '运行时间: 41天 8小时 8分钟 51秒'.



Риито

WWW.RIITO.COM

WEB

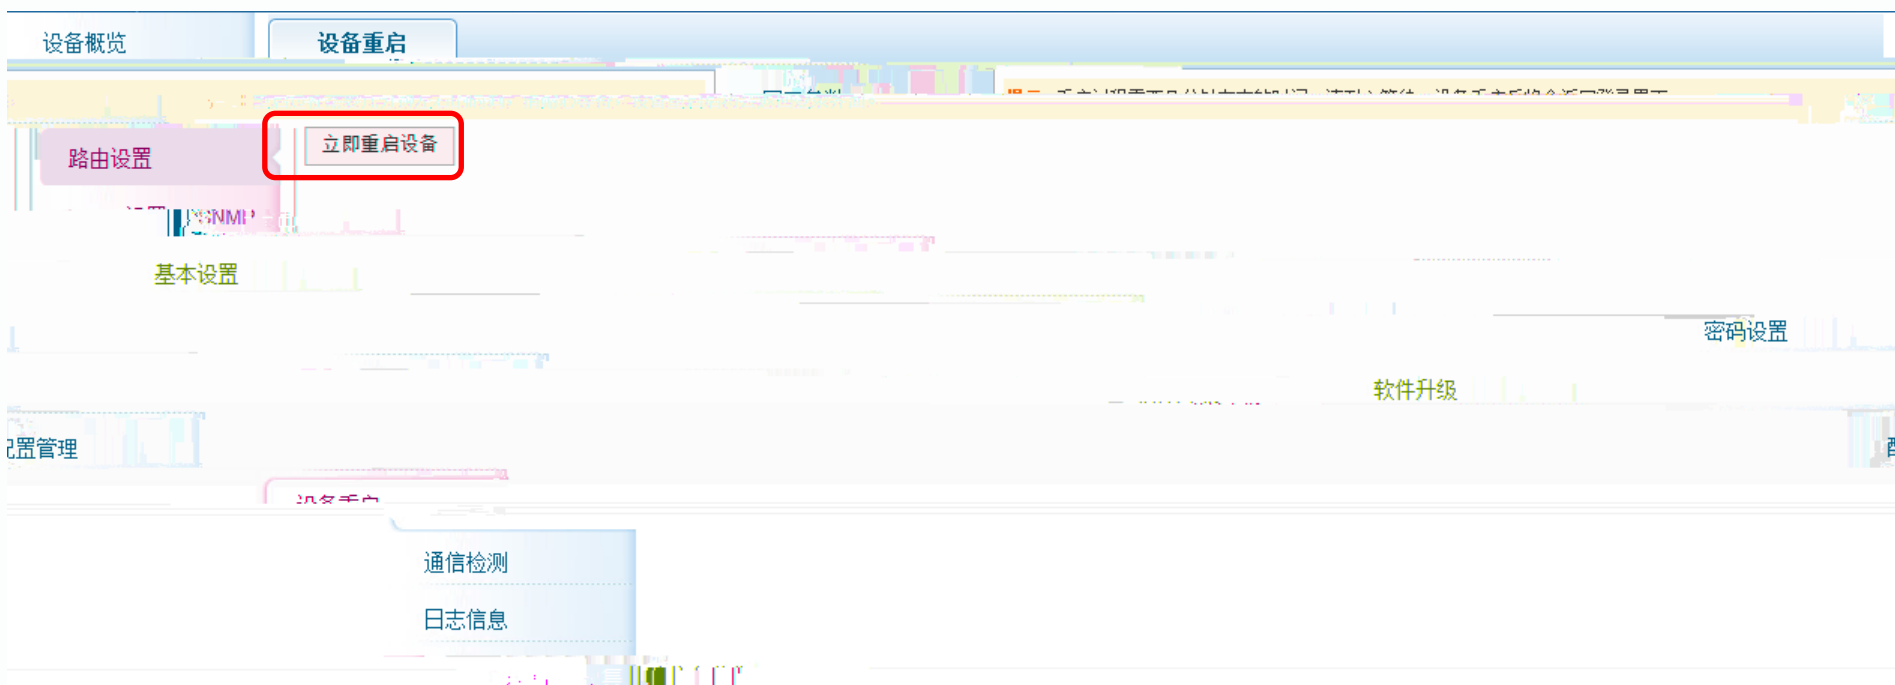

WEB

Ping

icmp
Traceroute

4G

WEB

WEB

设备概览

系统日志

网口参数

显示系统日志

路由设置

syslog logging: enabled

syslog logging: level debugging, 122819 messages logged

syslog logging: level debugging, 122819 messages logged

syslog logging: level debugging, 122819 messages logged

syslog logging: level debugging, 122819 messages logged

syslog logging: level debugging, 122819 messages logged

syslog logging: level debugging, 122819 messages logged

syslog logging: level debugging, 122819 messages logged

syslog logging: level debugging, 122819 messages logged

Timestamp log messages: datetime

通信

日志信息

劫持信自附件

WEB

CPU

设备概览

故障信息收集

网口参数

非传统配置

路由设置

SNMP设置

基本设置

System start time : 2014-08-04 15:50:17

密码设置

软件升级

System BOOT version : 10.4(3b13)T19 Release(175810)

日志信息

故障信息收集





Ruijie


WEB

APP

CLI

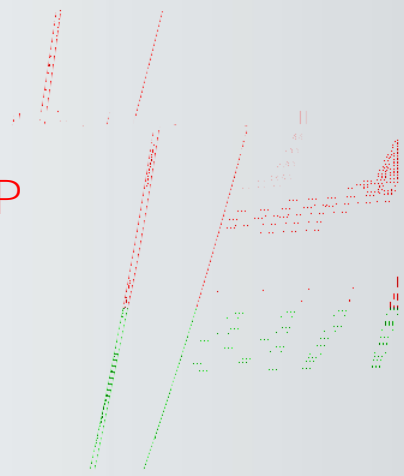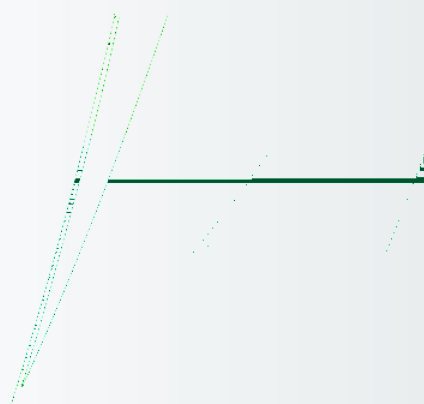


APP

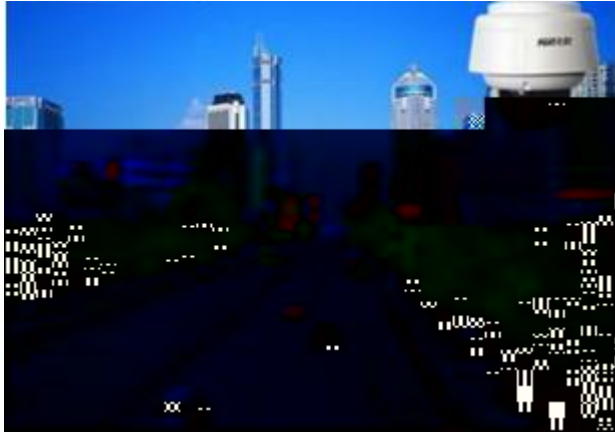

1

2

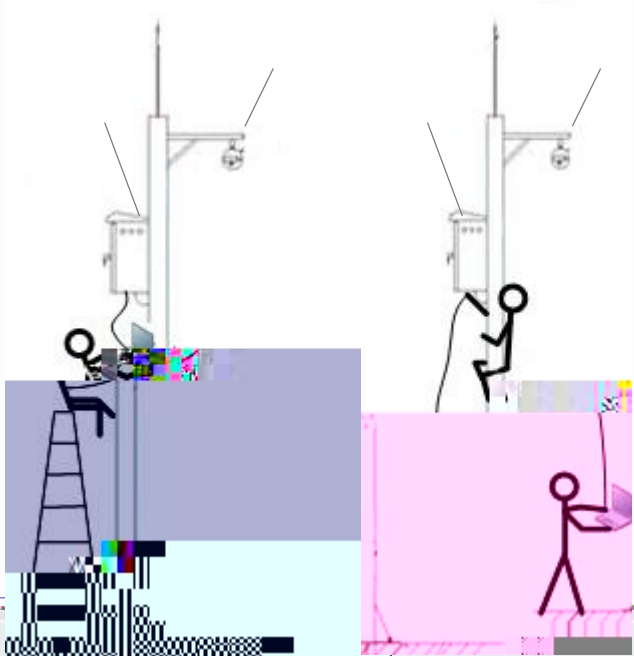

**RSR10-01G-TD-
LTE RSR820-T/820-T(A)**





APP

Android

Android

"

" APP

<http://bnm.ruijie.com.cn>

"

"



APP

10



" 1234 "



APP



APP

4G
4G
SIM
CPU

4G


APP

.text

SD

"

"

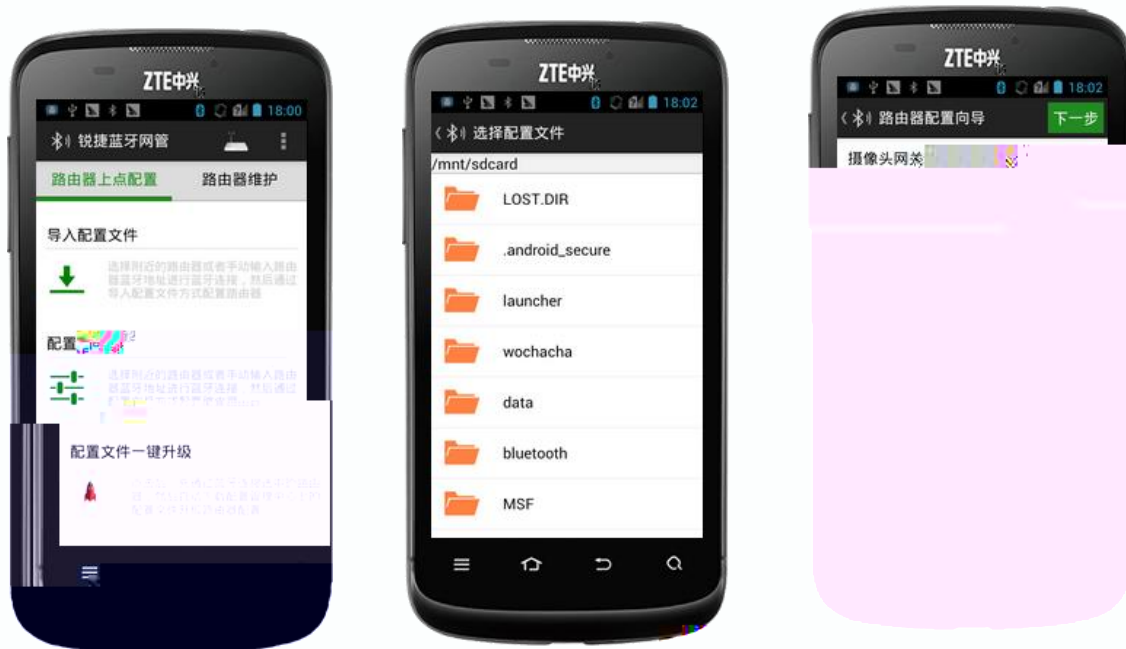



APP

Риито

WWW.RIITO.COM

APP

ICMP

4G

XX

4G

APP





APP

CLI

CLI

1

2

3

4

5

APP

APP

IP



APP

APP
txt

2G/3G/4G



APP

wifi

10

10

ruijie

ruijie

0000


1234



APP





APP

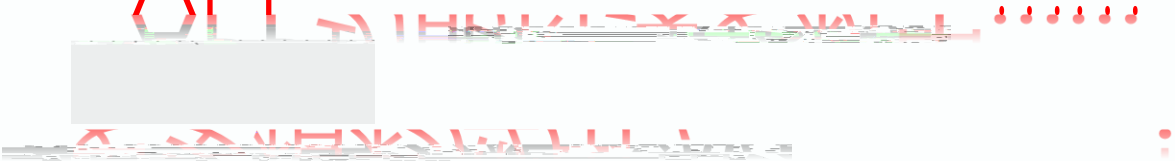

WEB

APP

CLI

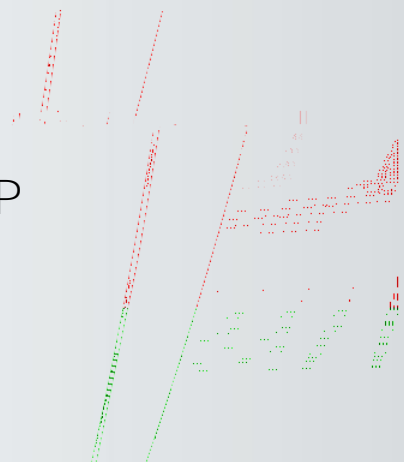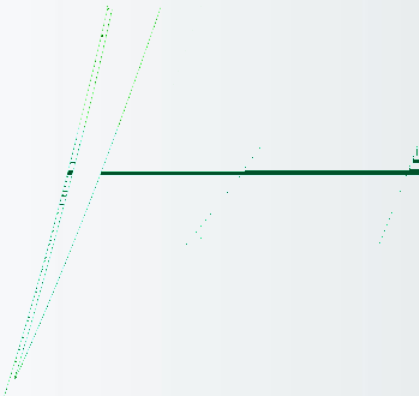

CLI

CLI

RSR820

RGOS

CLI

RGOS

CPU

show cpu cpu

Ruijie#show cpu

=====

CPU Using Rate Information

CPU utilization in five seconds: 12.12%

CPU utilization in one minute : 12.07%

CPU utilization in five minutes: 12.07%

show memory

Ruijie#show memory

System Memory Statistic:

Free pages: 54998

watermarks : min 2140, lower 4025, low 5910, high 7795

System Total Memory : 512MB, Current Free Memory : 225428KB

Used Rate : 57%



CLI

show interface


CLI

```
show log  
UP/DOWN DOWN !
```

```
flash
```

```
flash
```

```
Ruijie(config)#logging file flash:log 2000000 7 // 记录到flash
```

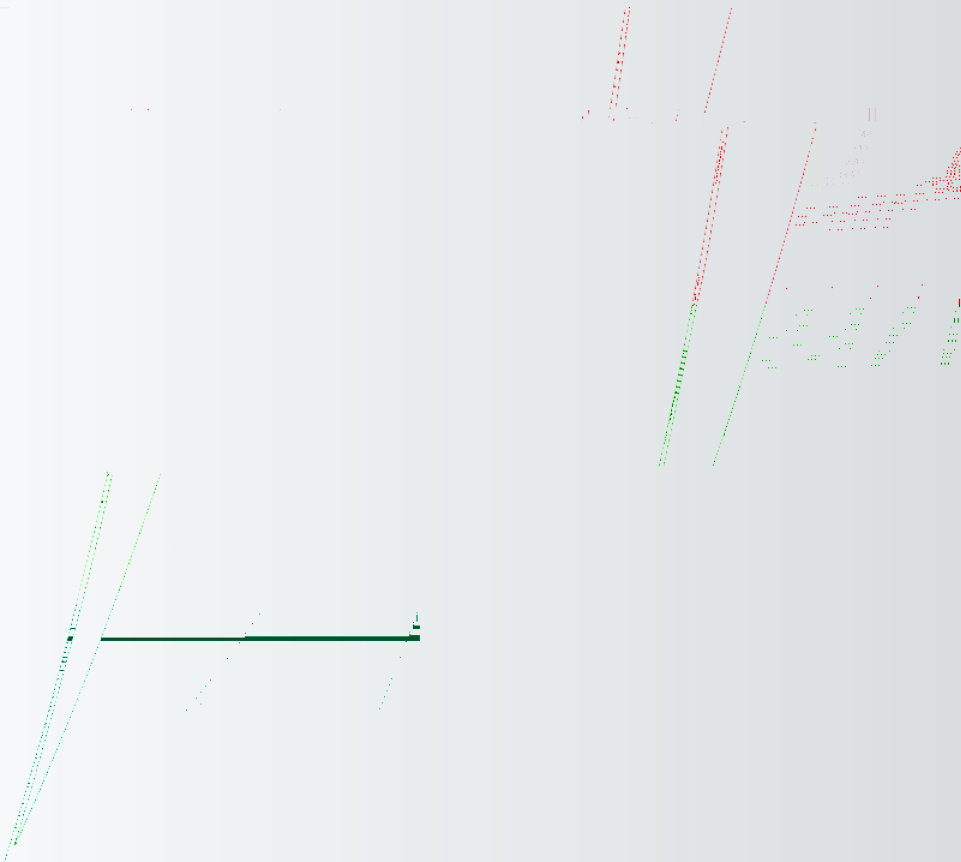

WEB

WEB IP

WEB

WEB

console

WEB IP

IP

<http://192.168.1.1>

Ruijie#show ip interface brief

Interface	IP-Address(Pri)	IP-Address(Sec)	Status	Protocol
VLAN 1	192.168.57.92/24	no address	up	up
Tunnel 1	2.2.2.2/24	no address	up	down
Cellular 0/0	no address	no address	down	down

console

Ruijie#show service

.....

web-server : enabled

web-server(https): enabled



console

console

PC

COM

Console

console



WEB

console

%Now Begin Download File FileList.txt From 192.168.64.1 to 192.168.64.78

send download request.

send download request.

.....

RGOS

TFTP


"

"

BOOT



show slot

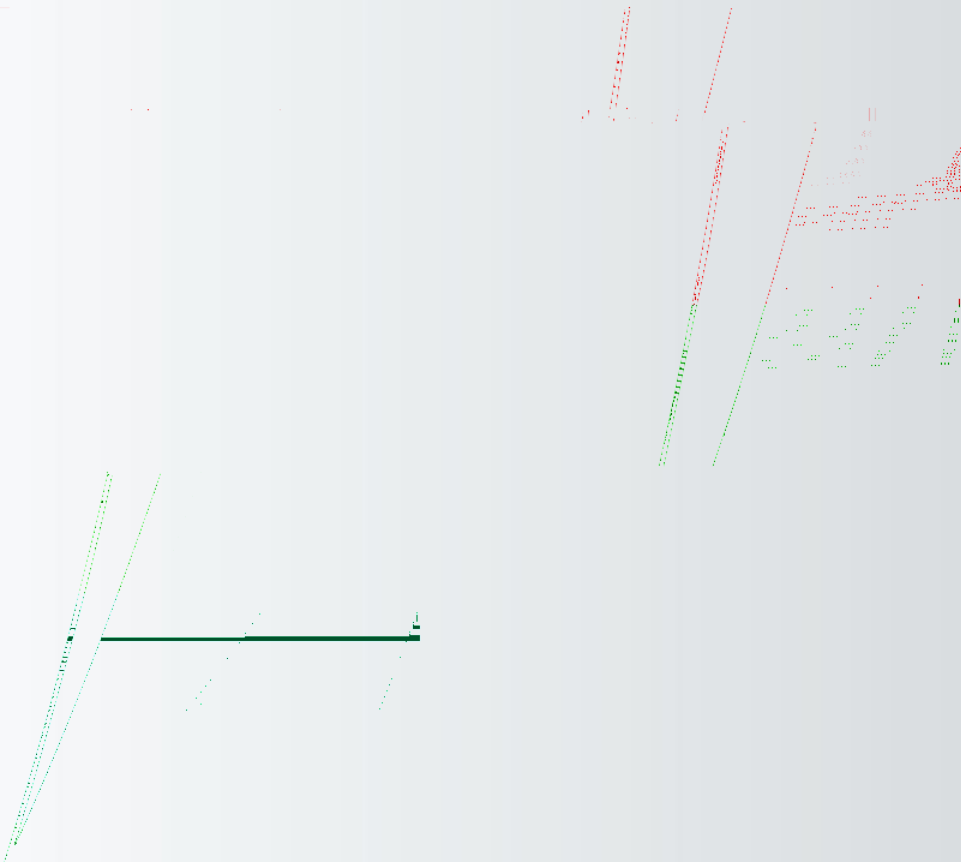

WEB

WEB

路由设置

恢复出厂设置

SNMP设置

基本设置

密码设置

软件升级

配置管理

设备重启

通信检测

日志信息

故障信息收集

MAIN

Ruijie#dir

Directory of flash:/

Mode	Link	Size	MTime	Name
1		2363	2013-01-15 10:07:19	config.text
1		15107168	2013-01-15 09:47:59	rgos.bin

.....

Ruijie#copy flash:config.text flash:config.bak// config.bak

Ruijie#delete config.text //

Are you sure you want to delete " config.text" ?[No/yes]yes //

Ruijie#reload //

Proceed with reload? [no]y //

BOOT

console

" Press Ctrl+C to enter Boot" ctrl+c

boot

BootLoader>dir

Directory of flash:/

Mode	Link	Size	MTime	Name
1		512	2013-01-09 23:07:03	Boot_hotcmd.cfg
1		2363	2013-01-15 10:07:19	config.text
			
1		15107168	2013-01-15 09:47:59	rgos.bin



BOOT

```
BootLoader>rename config.text config.bak // config.bak
```

```
BootLoader>delete config.text //
```

```
BootLoader>load //
```

.....

WEB

WEB

“ ”

“ ”

“ ”

注意事项:

升级可以系统固件 (*bin), 升级完成后必须重启设备才能生效。

升级可以升级MIB (*.mib), 升级完成后需要手工安装MIB文件。

版本信息

硬件版本:	1.00
软件版本:	RGOS 10.4(3b13)T19 Release(176433)
WEB版本:	1.1.3(176433)

文件路径:

 浏览...

升级进度:

0%

状态信息: 未指定升级文件。



故障信息收集

网门参数

路由设置

SNMP设置

基本设置

密码设置

软件升级

配置管理

设备重启

日志信息

深信检测

MAIN

	PC	IP		PC
PC	TFTP			TFTP
		TFTP		FLASH

copy tftp://[pc_ip]/[file_name] flash:rgos.bin

Ruijie#copy tftp://1.1.1.1/rgos.bin flash:rgos.bin

1.1.1.1 PC



BOOT

PC

TFTP

TFTP

ctrl+C

ROM

TFTP



Riite

WWW.RIITE.COM

www.ruijie.com.cn

www.ruijie.com.cn/service.aspx

support.ruijie.com.cn

webchat.ruijie.com.cn

4008-111-000