RG-NPE ٦ ٨ ٦

٦ ه پ

ד 10.3 4B8 ﻩ Ẉ J

אָ Contents

ṇ́ Ẃ ꟿ ï ấ ṇ

Ẃ ỏ ڈ ئ ṇ̀ ॏ

ٻ ے ʈ ב Ỡ ʉ ˛ ꭤ

ḅ n п ẁ ˈ

ņ̦Ẃ ㅅ ȉ ấ ņ

ㆁ ِيٍ ڮ ᑕ

ņ̦ Ẃ ㅅ ȉ ȋ ㄱ ȴ گ ớ ㅅ ȉ Ḝ ȋ́ ㄹ ꝑ Ֆ ʵ* Ẃظ Φص ㄴ ɜ ̀H ʌ א Ẋ ╥ ٹ Ֆ

ʵ ̋A è ꝑ ㅅ ﮪ ᾰ̃ ڨ Ứ ㅅ ̔Y Ֆ ʵ ß ↨ Ẉ ᾰ̋ Ֆ ʵ ȋ́ ㄹ ڌ Ω̦ Ḡ ㄴ ḧ

ˡ ۦ ş ظ Φ

ṇ Ẃ ԫ ї ấ ը

l ̂ ԩ

ȸ ț ʋ ȿ ȸ ț պ " ᴿ گ ṉ ܇ ş — ԋ ʧu Ẕ ẇ ῼ ┼ ṇ̀ ˝ Ĭ ṉ ɱ
گ ̈́ ├ Ỵ ˥ گ ṉ ܇ ▌┼ ꜛ ʒ ̀H ▌║ ἆ ῭ ῼ ẽ ᵠ ˥ ڗ ʒ
ɭ Ἃ↑ ڼ ɭ ῼ♬

ḅ ʽ í ῶ □ ẙ ɰ ᵽ ˜ Ἅ ע ᴸ □ ẙ ĩ ᵋ ᵽ 15°~30° ḫ ₅ᵽ ȸ
ț ڼ ɭ Æ ʃ ĩ ᵋ ῳ ܇ ˫ ! ȸ ț ɭ Ἃ ᶲ ˍ ĩ ᵋ ʐ פ ṇ̀ ầ ᵠ

ṇ Ẃ ᐱ ȉ ấ ṇ

I ˆ ᐫ

ˆ

ˆ	
PWR1 PWR2 ᑐ ◊ ˝Y ˜ ♂	ꝑ ᐱ ٙ ꝑ ẅ ڎ ᾰ ˈ ᑐ ᗑ ٙ
SYS ᐫ ᐱ ˝Y˜ ♂	ᑐ. Ḋ ק ᐱ ٙ ڎ ♣ . Ḋ ק Ḣ ᾰ ᐱ ٙ ᑐ ع □ ẙ ص ح ᗑ ٙ
FAN ˡ Ȁ˝Y˜ ♂	ꝑ ᐱ ٙ ꝑ ẅ ڎ ٹ

ņ Ẃ ٨ ĭ ấ ņ

CPU ٩

` ẹ Web ٦ ת ٩ ͺ ƥ ٧ ٨ ث ˜ ˜ CPU ! ז '



٩ ṇ

* Ẃ ừ CPU ! ז ' Ẕ 60% ḅ ' CPU ! ז ' ذ `H ژ ص ح ` ẹ ᵘ Φ
show cpu ˜ cpu ح ق ٩

- ḅ ' tnet ᾰ ᾰ buffer copy ق ٩ ح ب ˝ ₵ ! ı ΐ ᴘ ╙ ي ῴ ƥ گ ῴ Ȁ
  ᵏ گ ╙ ي ῴ
- ḅ ' ĭ ktimer ق ٩ ح ب ˝ ı ΐ è ƥ ج ◊ IP ῴ ᾰ ᾰ ╙ í ņ Ő ٩ ı ΐ
  ! ז ي ʌ ớ ΐ ı پ ח ῴ گ ĭ ذ ῼ ╙ í ب ں ņ Ő ʌ گ ه ' Ṉ ≡ ῶ ז
  ņ Ő ١ ʒ ٩ ὺ Ạ - CPU Ẃ ٩ ḧ ظ Φ
- ấ ņ ƥ Ṫ ٩ ụ ˝YṀ ق Φ ˜Ḥ

show attack-info

流量攻击告警

提示： 当前有 **10** 条流量攻击日志未查看。 [历史的攻击日志]

时间	总攻击报文数	总攻击字节数	持续时间(秒)	明细
明细	2012-11-5 0:50:41	1559	143759	6
明细	2012-11-5 0:49:32	6046	547854	23
明细	2012-11-5 0:49:22	1454	129443	6

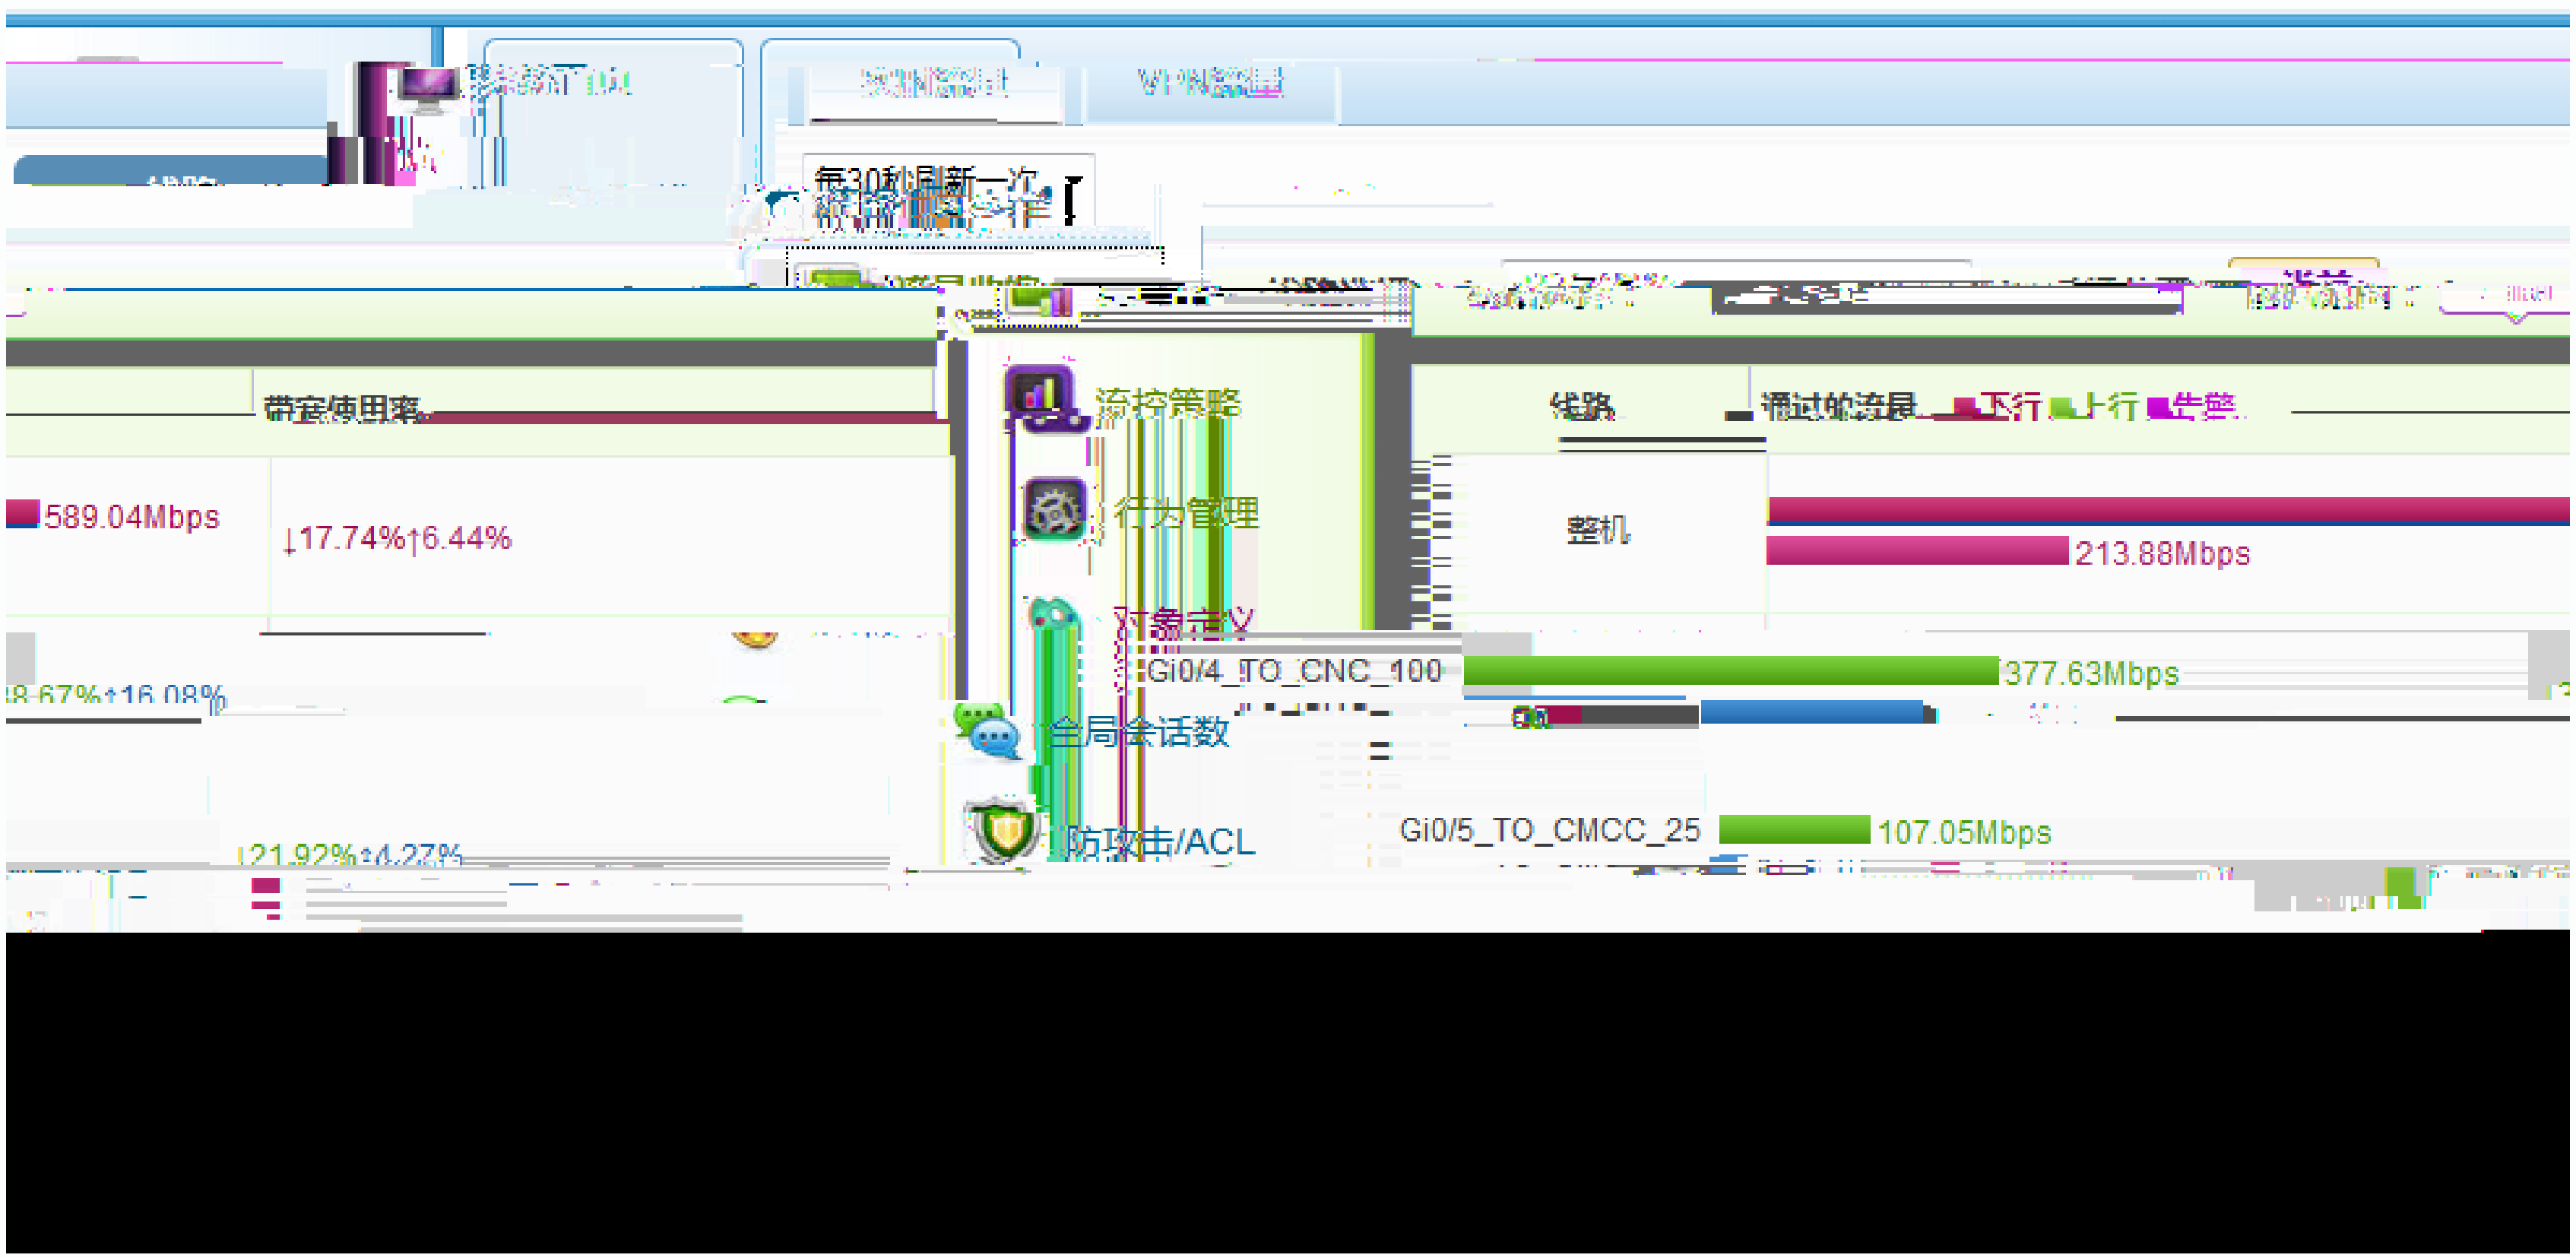
每30秒刷新一次
带宽使用率
589.04Mbps
↓17.74%↑6.44%
流控策略
行为管理
对象定义
全局会话数
防攻击/ACL
线路
整机
213.88Mbps
Gi0/4_TO_CNC_100
377.63Mbps
Gi0/5_TO_CMCC_25
107.05Mbps

ṇ̣ Ẃ ⩘ ï ấ ṇ

⩘ ∩

ḅ ˈ R ⩘ ت V̩ K̠ ʐ ˓ ᾆ ᾃ V̩ K̠ ˀ ب ˮ ت ˑ J̌ تبِ ﺎ ⊐

ق ﺓ ʐ ˓ ب ﺎ ﹻ ˪ ﺫ Ω̣ ק

5 V̩ K̠ ˀ ⩘ ت ĩ ε ب ﺎ ş ɣ ʐ 5 ʊ J̌ ت ˮ ⩘ ت ˑ

ᾆ ᾃ س ɲ ت ˑ

ﺫ Ω̣ ʐ ˓ ⩘ ﺹ g ق ﺓ ⩘ ﺹ ᾆ ᾃ Ȁ k* b DNS ת ẽ φ http Ẓ

ˀ ╙ ﹻ

ḅ ˈ ᾆ ᾃ ﺓ Ở ĩ ʌ ص • ὠ ﺤ ب ˮ ⩘ ت V̩ K̠ ˡ í̃ è

ᵽ ں

ḅ ˈ ب ﺎ ╙ í 5 ╙ í ⁝ ڽ ى̆ ĩ ε ب ﺎ* . ⩘ ت ⩘ ắ ک ĩ

ε ب ﺎ* .

5 ▫ ȸ ʈ ĩ ε ب ﺎ ╙ í ⩘ ﺹ ḅ ACE

ї ⩘ ﻅ ʔ ƀ ɲ ĩ ε ώ ʼH ج ⩘ ت V̩ K̠

ή Ẃ ʌ ĭ ấ ɲ

ʎ ¸ א Ψ ק ₅ ? T

ʎ ~

show logging ~ ĩ ε ω ầ Ẃ ή Ố

Show ip route counter ~ ث ˈ ´ Ѫ ,,

Ruijie#sh ip route count

--------- route info ----------

the num of active route: 3637 // ḅ ˈ ʌ א Ả Ѫ ⊐ Ẉ H Ѫ ˀ ⅝ Ψ ק Ẽ ⁎ ,, ب ˝ ۷

ʎ ¸ א Ψ ק ₅ ۷ ث ث ˈ ب ۷ ۷

Show arp counter ~ ARP ˊ ° Ѫ ,,

Ruijie#sh arp counter

Arp limit: 8192

Trusted arp limit: 4096

Count of trusted entries: 0

Count of static entries: 0

Count of dynamic entries: 35 (complete: 7 incomplete: 28)

Total: 35 // ḅ ˈ ARP ḅ ° Ѫ ,, ⊐ Ẉ

ņ Ẃ ﾑ ĭ ấ ņ

ﾑ

show interfaces ˈ ˜ ì ᴁ $ ﾉ ꟹ ﾉ ɰ Ụ

Ruijie#sh in g0/2
Index(dec):4 (hex):4
GigabitEthernet 0/2 is UP , line protocol is UP // ì ᴁ ꜛ ỗ
Hardware is OCTEON-SGMII GigabitEthernet, address is 001a.a93c.7a5e (bia 001a.a93c.7a5e)
Description: ﾍ ʋ ì
Interface address is: 203.68.158.194/28 // ﾑ ئip ꟹ ὢ ڭ Ụ
ARP type: ARPA,ARP Timeout: 3600 seconds
MTU 1500 bytes, BW 100000 Kbit // ì ᴁ MTU ꟹ Ṿ Ḵ ﺑ ﺑ ﾉ* .
Encapsulation protocol is Ethernet-II, loopback not set
Keepalive interval is 10 sec , set
Carrier delay is 2 sec
RXload is 33 ,Txload is 38
Queueing strategy: FIFO
Output queue 0/40, 0 drops;
Input queue 0/75, 0 drops
Link Mode: Up.
Speed 100M, Duplex full, Media-Type is copper. // ﻫ ' ᴥ Ṫ ɔ Ụ
30 seconds input rate 13234763 bits/sec, 2539 packets/sec // ì ᴁ ὢ ʌ ﻫ '
30 seconds output rate 14947442 bits/sec, 2592 packets/sec
10189718231 packets input, 9035647618958 bytes, 1577884 no buffer, 0 dropped
Received 14617 broadcasts, 0 runts, 0 giants
1 input errors, 0 CRC, 0 frame, 0 overrun, 0 abort // ì ᴁ buffer ꟹ crc ﾉ ɰ ḅ ' buffer ꟺ ﺓ Ễ
ò ب ˝ $ ȿ è ꝑ ầ Ẃ ﺍ ꝑ $ ȿ ớ ἳ Ẋ ₅ ˈ ἳ ᵋ è ꝑ ƃ ⅜
9147644751 packets output, 4948330971734 bytes, 0 underruns , 0 dropped
0 output errors, 0 collisions, 0 interface resets

ή Ẃ ʌ ĭ ấ ɲ

ϟ

show attack-info ❡ ˜ ᾢ Ụ

Ruijie#sh attack-info history

System attack record at 2012-12-20 10:1:9, System in attack 9s

ALL: 3631 packets, 258995 bytes

PROTOCOL packets bytes

TCP 10 652

UDP 3621 258343

TOP10 IP attack:

IP packets bytes interface

223.3.43.116 1261 88710 Te0/1 //ᾢ ◊ ᾢ ĭ ă ᶻ ṇ ʎ ɯ

121.248.25.211 1184 81696 Te0/1

121.248.27.19 1017 70173 Te0/1

ŋ Ẃ ʎ ĭ ấ ŋ

ʮ

show ip fpm statistics ˥ ˜ Ẹ˙ ʮ ʎ ╙Ẉ ᴶ ṕ Ụ

Ruijie#sh ip fpm statistics

The capacity of the flow table:3000000

Number of active flows:747612 //Ḿ ⅝ Ề ª ̀H ¯ ￼ΏΩ ḅ ' Ṯ˛ θ ᵶ ˷ ˡ ᵳ ᴘ˙ ɺ ʎ ῳ̈̀ ḅ ' ʎ̆ Ề ￼ΏΩ Ề ʮ ΦΏΩ ì ǵ ᾶ̉ Ẹ ب ˮ ╙ ˜ Ṯ ɺ ɿ ◗

Number of the defragment contexts:399

Number of the buffers hold by FPM:399

Event count (%256):241

Show online statistics global ˥ ˜ Ẹ˙ ῥ ɺ ɿ ΆΏΩ ˛ ⊃ ʕ ΏΩ

Ruijie#sh online statistics global

global

online ip count: 10455 //Ḿ ⅝ Ề ª ̀H ¯ ￼ΏΩ ᾶ ᾶ ɿ ΆΊ ɲ ʮ ʎ ￼ῥ ɺ ɿ ΆΩ ḅ SAM ḅ ' ΏΩ Ṯ ầ ᶑ ᵶ ˷ ˡ ᵳ è ῥ ɺ ʎ ầ Ẃ

online session: 764326

ŋ Ẃ ʌ ĭ ấ ɲ

ʎ

ṇ Ẃ ﾑ ï ấ ṇ

Web

ﾑ / Ḡ ֆ ẗ ٦ ภ ᵔ ű ᴺ￼ Ḻ ọ ء ẉ ḯ ﭤ ﺱ ɒ Ḻ Ḻ ﺫ ẙ ﹰ

6 Ẋ ḧ Ω̣ ẉ Ḻ ꞵ ﺨ ٩ J̌ ˚ ——ﾑ / ֆ ﾉ—— ẉ Ḻ ֆ ﾉ

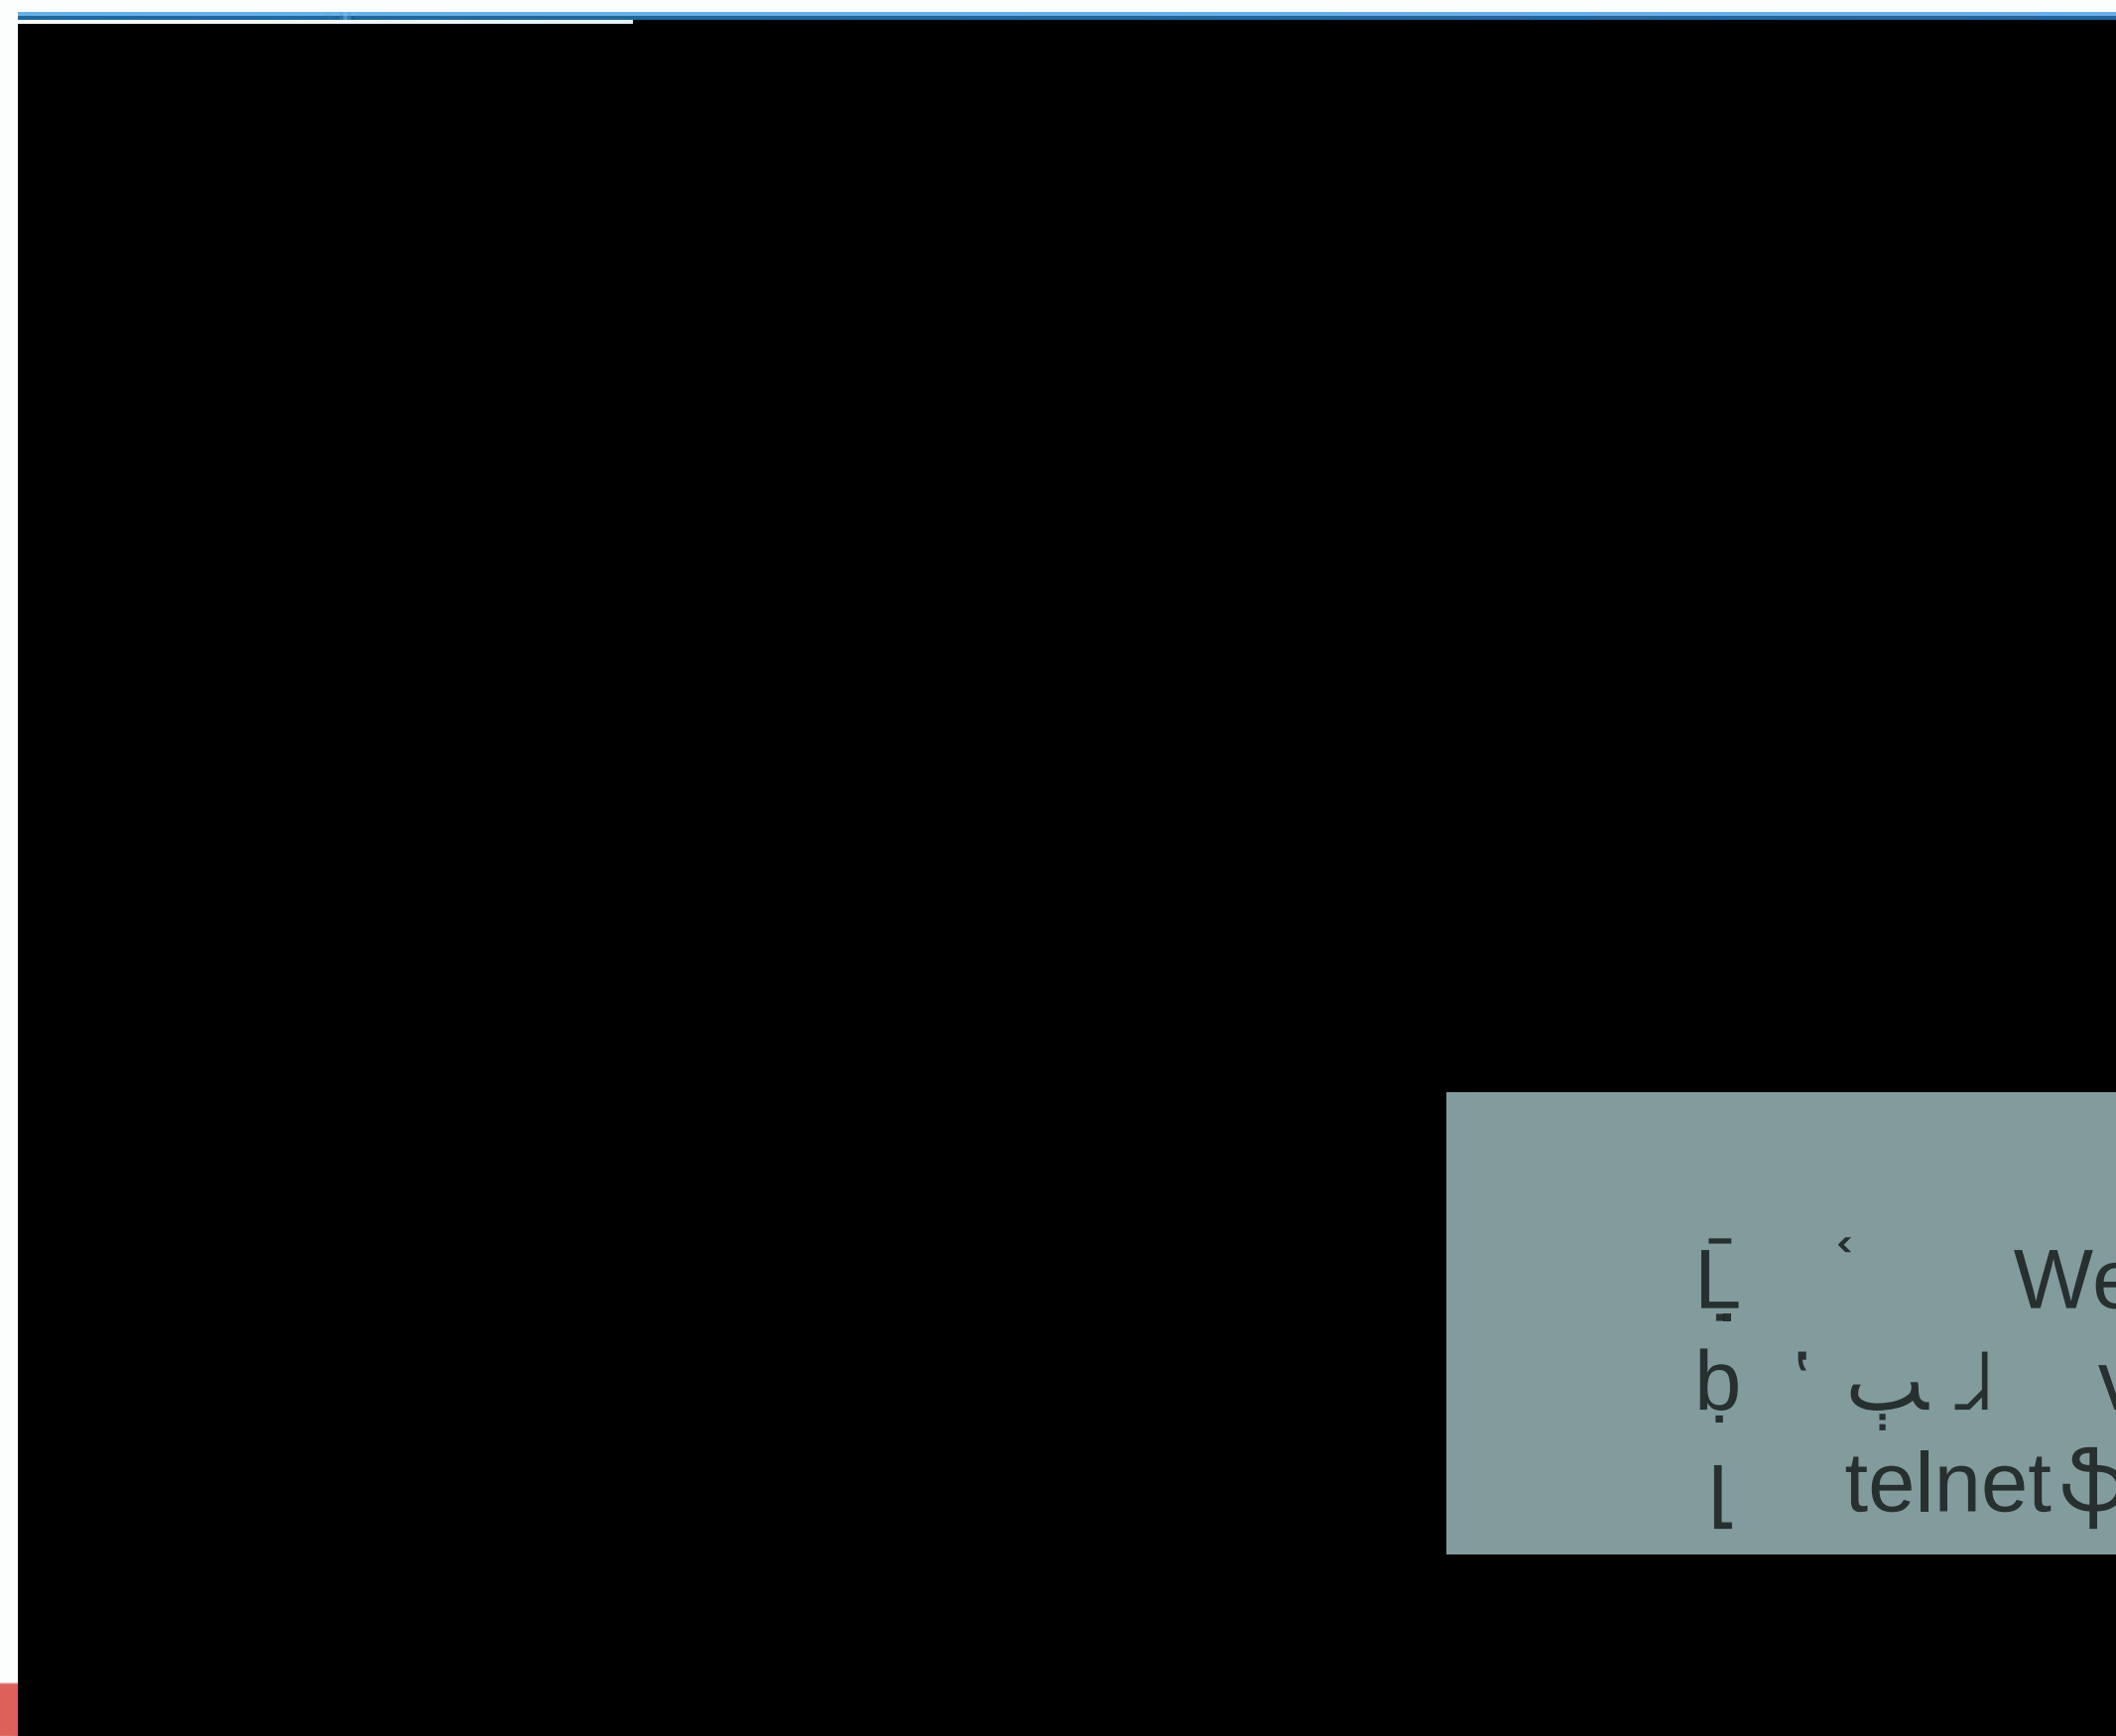

Ḻ ˓ Web Ḻ ᵓ telnet Ḻ
ḅ ʿ ﺏ ﾉ vpn ặ ȁ web ɒ - ﮼
ﮖ telnet ֆ ﾉ ɒ - Ḻ

ŋ Ẃ ﾑ ĭ ấ n

ᠰ ᠲ پ

ﾑ ﾉ `H ڑ * . Ṁ₇ ⊃ `H ڑ̀ ￼ ı ấ ڐ ئ Ẕ - ﾑ ﾉ `H ڑ . ŋ ئ ὠ `H

ڑ ت ᶀ ح ﾉ J̌ ° —— ﾑ ﾉ ф ﾉ —— ﾑ ﾉ `H ڑ ὠ

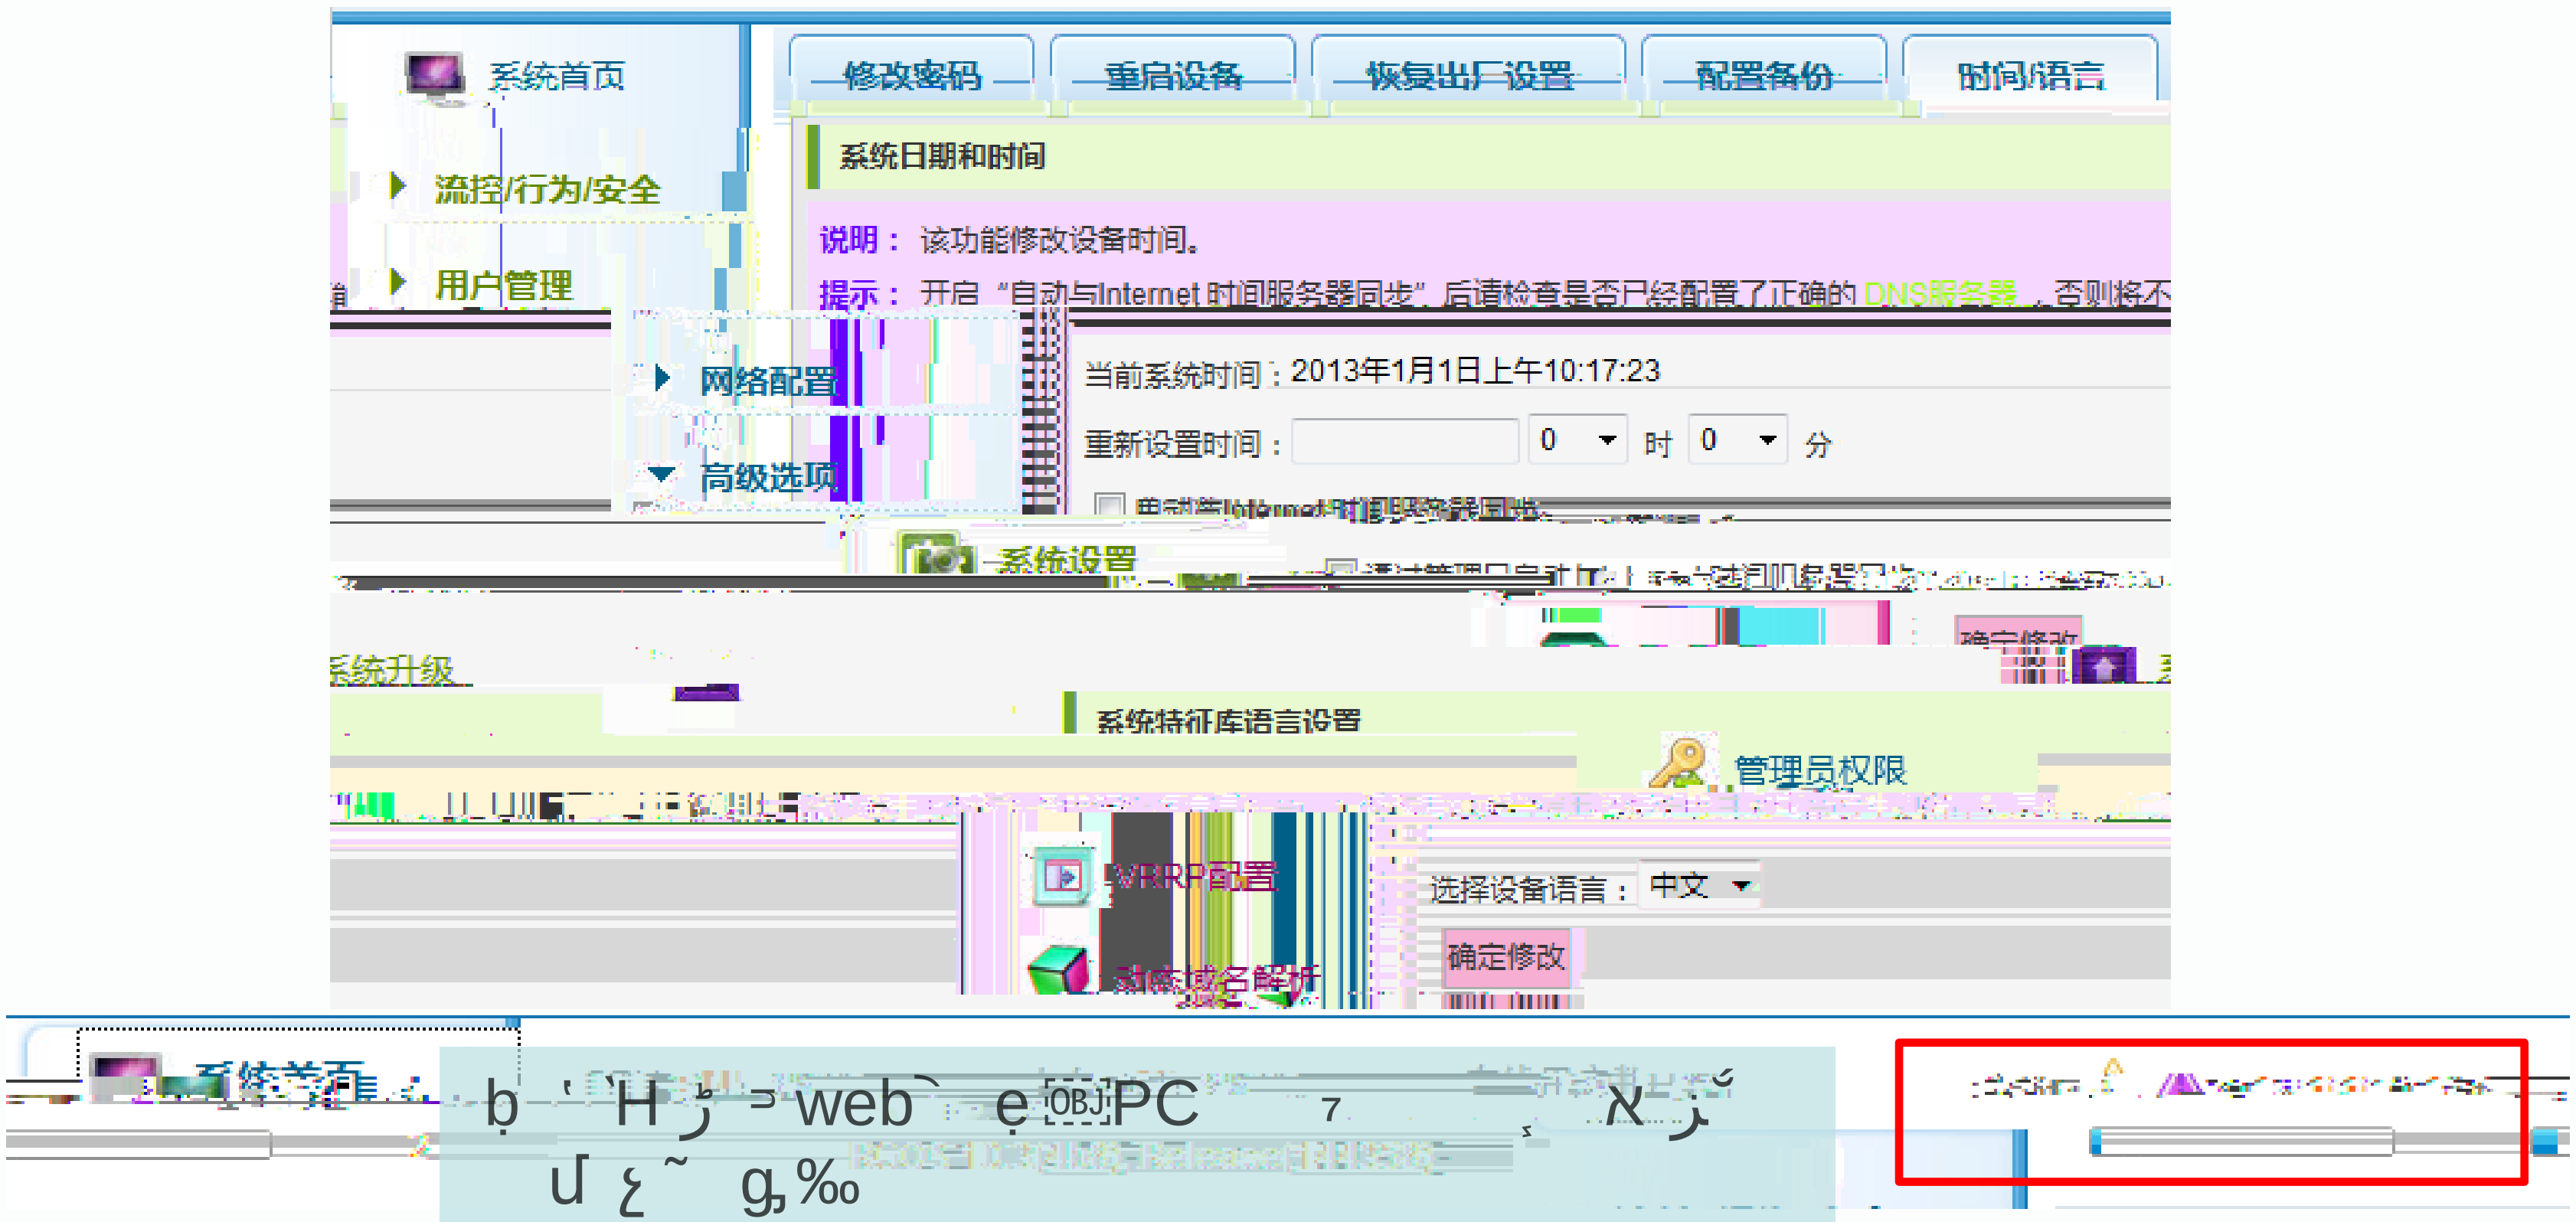

ḅ `H ڑ ⊃ web e ￼PC ₇ א ڑ
 џ ɛ ˜ g‰

אָ Contents

ṇ́ Ẃ ⩘ ï̋ ấ ɲ

Ẃ ỡ ڏ ئ ṇ̀ĩ

ٻ ɺ ʇ ⊐ Ỡ ʉ ̗ ɶ

ḅ ṇ п ẁ ˈ

Ẃ ƌ ڐ ئ ṅ‖

ڀ ھ ع

ᵁ ˩ ݣ ̎A ṇ̀ | * ẂԱ ڐ ˩ ˨ ᴭ ĩ ṃ`O ռ

ڀ ھ

˨ ᴭ զ ظ ʔ ƀ Ṃ ὲ
`O ռ ᴴ ڐ ئ ˩ ݣ ̎A ݣ ˩ ş ҳ ṇ̀ | Աڐ Ỉ `O ռ
Ɱ ڝ ث ꜜ ᵓ ĩ ṃ h„ ₇
^ ˛ ᴭ ɫ ث Ễ ₇
`O ռ ɹ ɭ ª `H ĩ ṃ ^ ˨ ᴭ ˨ ᴭ ĩ ṃ
ᵁ ˩ ݣ ̎A˙ ᵁ ˩ ş ҳ ˡ ڗ

Ձ

ῴ ᵁ ˩ ĩ ṃ ˨ ᴭ
₅‖ `O ռ ᴴ Ֆ ˩
Ɱ ڝ ث ꜜ ᵓ ĩ ṃ h„ ʽY ₇
Ȁ ᵏ ◊ ڨ ◊ ˛
ĩ ṃ Ḣ Ω̰ ˨ ᴭ
ȉ ˧ ظ ʔ ƀ ṅ‖ ˦ ث ڐ ئ

Ẃ ð ڐ ئ ṅ┱

پ ھ ﻋ

ﻟ ﮪ ẙ ỹ ﬡ ẜ ﻟ ̿ ἓ Ẫ ả ̀H ܟ ᵁ ﻟ ɣ

پ ھ

ث ﹸ ﻟﺐ ᵀ ת ḅ כ ￼ ث ﹸ ˙ ȉ ڼ ﻟ ث Ṁ ⅃ ﺎ ڐ ả ̀H ա ẕ

•ᶧ ﻟ ثṾ Ḵ Ṯ ﻟ ʠ ¡ ◗

ﻟ ʎ è ẜ ῷ̀

ᴾ ˙ ╙ í ں ˙

ﻟ ث ﮪ ' ʙ ƀ ﭻ ئ ᾰ̉ ᾰ̈ ﺝ ث و ﯾ ڐ ئ

ᘓ

ῷ ث ﹸ ﻟﺐ . ﺎ ڐ ȋ ʘ ̀H ả ﺩ ￼ ﻟ ث

ﭗ ﺹ ק ث ﹸ ვ ق ڌ ʐ ʿ ﻟﺐ ﻟ ثṾ Ḵ ệ ˙ ᵀ ת￼ ﺯ

ﭗ ﺹ ﻟﺐ Ḡ گ ῷ̀ Ⅵ ﺻ ṅ ٹ ῷ̀ ◊ ɹ

₅┱ ﻟ ʎ ȋ ᵋ è ẜ ╙ í ₱ ȶ ȋ ᵋ ﻟﺐ ╙ í Ⅵ ﺻ

῝ ῞Ω ﺝ ث ᾰ̉ ᾰ̈ ₩ ę ȉ ﻟ ﻅ Ꞁ ƀ ₅┱ Ḿ ﻟ ₱ ȶ

Ẃ ȣ ڈ ئ ṅ

پ ه ع

ф ȶ cpu ي ح web ។ ת ф ȶ ȷ ping ф ȶ ˡ ȉ è ꝑ ɣ ᾰ ᾱ ả ˋH ح

پ ه

ﻝ ﾅ è ꝑ ῴ

ꝑ ᵉ ᵆ Ễ ح ừ Ầ ᵏ ╙ í ῃ Ố ʌ گ ؠ ي ╦ ᾰ ớ ȉ ˡ ȉ

ˬ ᴭ Ṿ Ḵ ص ᵚ ᾰ ᾱ ʕ ῼ ì ἓ ф ȶ ǁ ں

Ձ

ڽ ص ب ﻝ Ḡ گ ῴ ﾑ ﺇ ṅ ٹ ῴ ◊ ȷ

╙ í ı ȉ ῼ ᾰ ḧ ф ȶ ớ ȉ ˡ ڽ ص ACE ؠ ╙ í ф ȶ ḫ א ╙ í ı ȉ ᾰ ᾱ

ק ╙ í ب ﻝ ں ớ ȉ ╦ ᾰ Ḿ ῃ Ố ʃ ת ˡ ڽ ص ں ῃ Ố ʌ گ ه '

Ṉ ọ ꞁ ῃ Ố ។ ʒ ק ф ȶ ớ ȉ

ڽ ص ᴭ Ḝ ḳ ȷ

אָ Contents

ή Ẃ ᛅ ΐ ấ ɲ

Ẃ ố ڈ ئ ὴ╿

ب ﺭ ʇ ב Ỡ ʉ ˛ ꬱ

ḅ n ח ẁ ˈ

ﭗ ﾑ ʢ ⊃ Ỡ ʉ ¸ ǝo

ﻓ ᄼ

ƥ ҳ ᄼ J̌ ˚ ——ᄿ ᄼ $ ﾑ ——ﭗ ﾑ ʢ Ṁ¸ Ẹ˙ ﭗ ﾑ ﻗ Φ ʢ

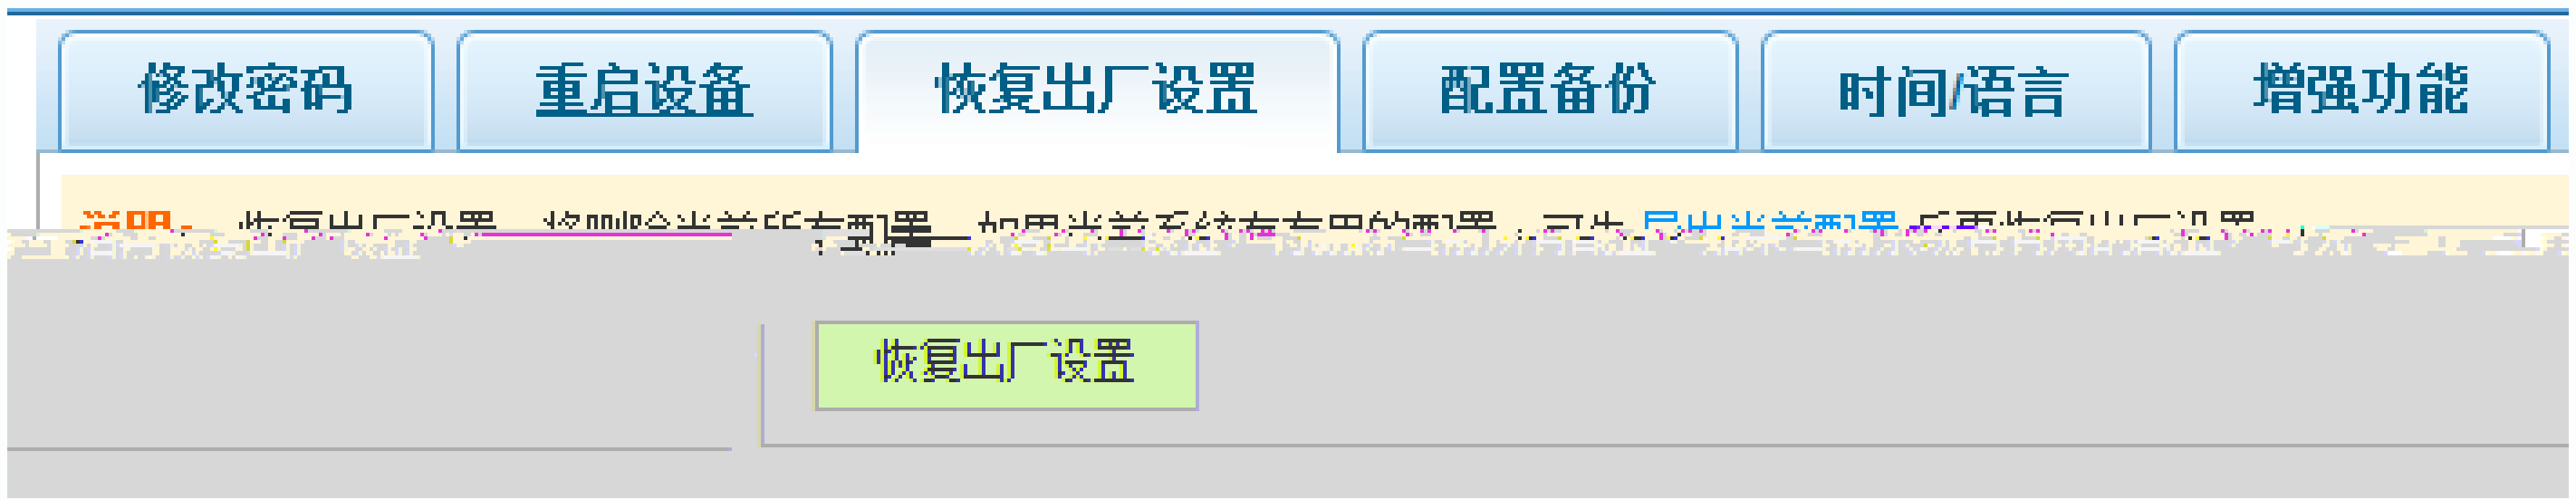
修改密码
重启设备
恢复出厂设置
配置备份
时间/语言
增强功能
恢复出厂设置

אָ Contents

ῃ Ẃ ⩘ ΐ ấ ɲ

Ẃ ǒ ڈ ئ ὴ ╿

ﭗ ﮊ ‡ ב Ớ ʉ ˛ ꝏ

ḅ n п ẁ ˈ

Ŋ

⁵ ׀ `O ռ

- ڃ ὰ ḥ Ά ث ٙ www.ruijie.com.cn
- ډ ⊃ ᾰ ⁶ ڗ www.ruijie.com.cn/service.aspx
- ڃ ὰ ؍ ꟿ ʽH `O ռ ο ʒ support.ruijie.com.cn

پ ١ ʽH ٓḤʽY

- ꞵ ߊ i̱ `O webchat.ruijie.com.cn
- ʽH ٓḤʽY♬ ߊ 4008-111-000